


Round flanged units cast housing w/ spigot joint
Set screw type

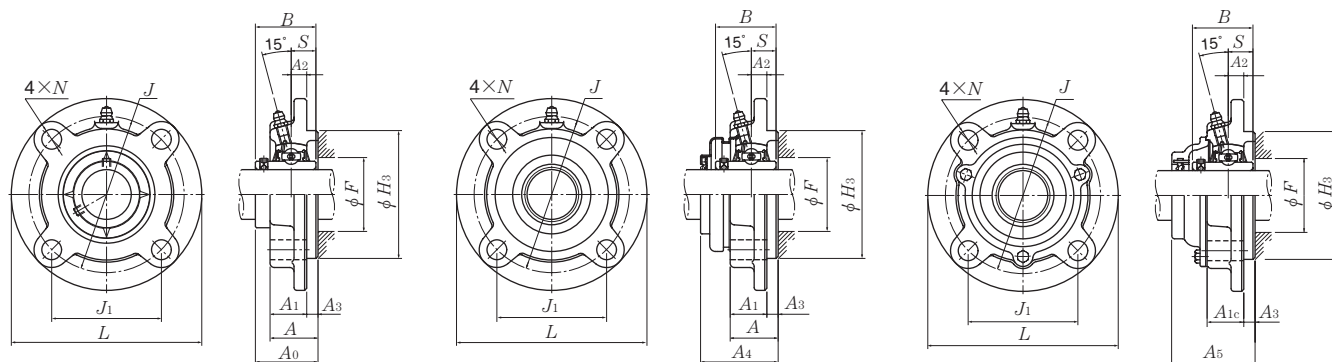

Press steel dust cover type (Open end)
S-UCFC...D1

Cast dust cover type (Open end)
C-UCFC...D1

Shaft dia.	Unit number ¹⁾	Nominal dimensions														Bolt size
		mm							inch							
		<i>L</i>	<i>J</i>	<i>(J₁)</i>	<i>A</i> ₂	<i>N</i>	<i>A</i> ₃	<i>A</i> ₁	<i>A</i> _{1C}	<i>A</i>	<i>H</i> ₃	<i>A</i> ₀	<i>B</i>	<i>S</i>	<i>F</i> min	
50 1 ¹³ / ₁₆ 1 ⁷ / ₈ 1 ¹⁵ / ₁₆ 2	UCFC210D1 UCFC210-113D1 UCFC210-114D1 UCFC210-115D1 UCFC210-200D1	165	138	97.6	10	16	12	28	29	40	110	54.6	51.6	19	—	M14
55 2 2 ¹ / ₁₆ 2 ³ / ₈ 2 ³ / ₁₆	UCFC211D1 UCFC211-200D1 UCFC211-201D1 UCFC211-202D1 UCFC211-203D1	6 ¹ / ₂	5 ⁷ / ₁₆	3 ²⁷ / ₃₂	2 ⁵ / ₆₄	5 ⁵ / ₈	1 ⁵ / ₃₂	1 ³ / ₃₂	1 ⁵ / ₃₂	1 ³⁷ / ₆₄	4.3307	2 ⁵ / ₃₂	2.0315	0.748	—	1 ¹ / ₂
60 2 ¹ / ₄ 2 ⁵ / ₁₆ 2 ³ / ₈ 2 ⁷ / ₁₆	UCFC212D1 UCFC212-204D1 UCFC212-205D1 UCFC212-206D1 UCFC212-207D1	185	150	106.1	13	19	12	31	32.5	43	125	58.4	55.6	22.2	—	M16
65 2 ¹ / ₂ 2 ⁹ / ₁₆	UCFC213D1 UCFC213-208D1 UCFC213-209D1	7 ⁹ / ₃₂	5 ²⁹ / ₃₂	4 ¹¹ / ₆₄	3 ³ / ₆₄	3 ³ / ₄	1 ⁵ / ₃₂	1 ⁷ / ₃₂	1 ⁹ / ₃₂	1 ¹¹ / ₁₆	4.9213	2 ¹⁹ / ₆₄	2.1890	0.874	—	5 ⁵ / ₈
70 2 ⁵ / ₈ 2 ¹¹ / ₁₆ 2 ³ / ₄	UCFC214D1 UCFC214-210D1 UCFC214-211D1 UCFC214-212D1	195	160	113.1	17	19	12	36	38	48	135	68.7	65.1	25.4	—	M16
75 2 ¹³ / ₁₆ 2 ⁷ / ₈ 2 ¹⁵ / ₁₆ 3	UCFC215D1 UCFC215-213D1 UCFC215-214D1 UCFC215-215D1 UCFC215-300D1	7 ¹¹ / ₁₆	6 ¹⁹ / ₆₄	4 ²⁹ / ₆₄	4 ³ / ₆₄	3 ³ / ₄	1 ⁵ / ₃₂	1 ¹³ / ₃₂	1 ¹ / ₂	1 ⁵⁷ / ₆₄	5.3150	2 ⁴⁵ / ₆₄	2.5630	1.000	—	5 ⁵ / ₈
80 3 ¹ / ₁₆ 3 ³ / ₈ 3 ³ / ₁₆	UCFC216D1 UCFC216-301D1 UCFC216-302D1 UCFC216-303D1	205	170	120.2	16	19	14	36	38	50	145	69.7	65.1	25.4	—	M16
		8 ¹ / ₁₆	6 ¹¹ / ₁₆	4 ⁴⁷ / ₆₄	5 ⁵ / ₈	3 ³ / ₄	3 ⁵ / ₆₄	1 ¹³ / ₃₂	1 ¹ / ₂	1 ³¹ / ₃₂	5.7087	2 ³ / ₄	2.5630	1.000	—	5 ⁵ / ₈
		215	177	125.2	17	19	14	40	39.5	54	150	75.4	74.6	30.2	94	M16
		8 ¹⁵ / ₃₂	6 ³¹ / ₃₂	4 ⁵⁹ / ₆₄	4 ³ / ₆₄	3 ³ / ₄	3 ⁵ / ₆₄	1 ³⁷ / ₆₄	1 ⁹ / ₁₆	2 ¹ / ₈	5.9055	2 ³¹ / ₃₂	2.9370	1.189	3 ⁴⁵ / ₆₄	5 ⁵ / ₈
		220	184	130.1	18	19	16	40	43	56	160	78.5	77.8	33.3	100	M16
		8 ²¹ / ₃₂	7 ¹ / ₄	5 ¹ / ₈	4 ⁵ / ₆₄	3 ³ / ₄	5 ⁵ / ₈	1 ³⁷ / ₆₄	1 ¹¹ / ₁₆	2 ¹³ / ₆₄	6.2992	3 ³ / ₃₂	3.0630	1.311	3 ¹⁵ / ₁₆	5 ⁵ / ₈
		240	200	141.4	18	23	16	42	43	58	170	83.3	82.6	33.3	105	M20
		9 ⁷ / ₁₆	7 ⁷ / ₈	5 ⁹ / ₁₆	4 ⁵ / ₆₄	2 ⁹ / ₃₂	5 ⁵ / ₈	1 ²¹ / ₃₂	1 ¹¹ / ₁₆	2 ⁹ / ₃₂	6.6929	2 ⁹ / ₃₂	3.2520	1.311	4 ¹ / ₈	3 ³ / ₄

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".

Note: Please refer to page 44 for size of grease fitting.