


**The Timken Company**

4500 Mt Pleasant St. NW


N. Canton, OH 44720

**Phone:** (234) 262-3000

**E-Mail:** [CustomerCAD@timken.com](mailto:CustomerCAD@timken.com) • **Web site:** [www.timken.com](http://www.timken.com)

## Part Number 2689, Tapered Roller Bearings - Single Cones - Imperial

This is the most basic and most widely used type of tapered roller bearing. It consists of two main separable parts: the cone (inner ring) assembly and the cup (outer ring). It is typically mounted in opposing pairs on a shaft.

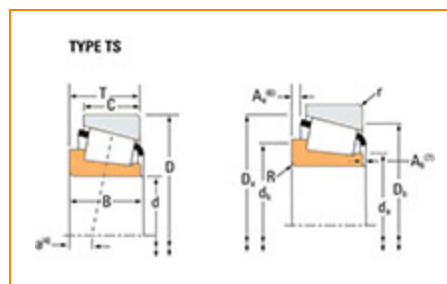

[Specifications](#) | [Dimensions](#) | [Abutment and Fillet Dimensions](#) | [Basic Load Ratings](#) | [Factors](#)

### Specifications

<b>Series</b>	2600
<b>Cone Part Number</b>	2689
<b>Design Units</b>	Imperial
<b>Cage Type</b>	Stamped Steel
<b>C1 - Dynamic Radial Rating (Two-Row, 1 million revolutions)<sup>1</sup></b>	30000 lbf 133000 N
<b>C90(2) - Dynamic Radial Rating (Two-Row, 90 million revolutions)<sup>2</sup></b>	7780 lbf 34600 N



Dimensions

<b>d - Cone Bore</b>	1 1/8 in 28.575 mm
----------------------	-----------------------

<b>B - Cone Width</b>	1.0013 in 25.433 mm
-----------------------	------------------------

## Abutment and Fillet Dimensions

<b>R - Cone Backface "To Clear" Radius<sup>3</sup></b>	0.05 in 1.3 mm
--	-------------------

<b>da - Cone Frontface Backing Diameter</b>	1.42 in 36 mm
---	------------------

<b>db - Cone Backface Backing Diameter</b>	1.48 in 37.5 mm
--	--------------------

<b>Ab - Cage-Cone Frontface Clearance</b>	0.06 in 1.5 mm
---	-------------------

<b>Aa - Cage-Cone Backface Clearance</b>	0.01 in 0.3 mm
--	-------------------

<b>a - Effective Center Location<sup>4</sup></b>	-0.37 in -9.4 mm
--	---------------------

## Basic Load Ratings

<b>C90 - Dynamic Radial Rating (90 million revolutions)<sup>5</sup></b>	4470 lbf 19900 N
---	---------------------

<b>C1 - Dynamic Radial Rating (1 million revolutions)<sup>6</sup></b>	17200 lbf 76600 N
---	----------------------

<b>C0 - Static Radial Rating</b>	18400 lbf 81700 N
----------------------------------	----------------------

<b>C<sub>a90</sub> - Dynamic Thrust Rating (90 million revolutions)<sup>7</sup></b>	1940 lbf 8640 N
---	--------------------

## Factors

<b>K - Factor<sup>8</sup></b>	2.3
<b>G1 - Heat Generation Factor (Roller-Raceway)</b>	19.3
<b>G2 - Heat Generation Factor (Rib-Roller End)</b>	8
<b>Cg - Geometry Factor<sup>9</sup></b>	0.0598

<sup>1</sup> Based on  $1 \times 10^6$  revolutions  $L_{10}$  life, for the ISO life calculation method.

<sup>2</sup> Based on  $90 \times 10^6$  revolutions  $L_{10}$  life, for The Timken Company life calculation method.  $C_{90}$  and  $C_{a90}$  are radial and thrust values for a single-row,  $C_{90(2)}$  is the two-row radial value.

<sup>3</sup> These maximum fillet radii will be cleared by the bearing corners.

<sup>4</sup> Negative value indicates effective center inside cone backface.


<sup>5</sup> Based on  $90 \times 10^6$  revolutions  $L_{10}$  life, for The Timken Company life calculation method.  $C_{90}$  and  $C_{a90}$  are radial and thrust values.

<sup>6</sup> Based on  $1 \times 10^6$  revolutions  $L_{10}$  life, for the ISO life calculation method.

<sup>7</sup> Based on  $90 \times 10^6$  revolutions  $L_{10}$  life, for The Timken Company life calculation method.  $C_{90}$  and  $C_{a90}$  are radial and thrust values for a single-row,  $C_{90(2)}$  is the two-row radial value.

<sup>8</sup> These factors apply for both inch and metric calculations. Consult your Timken representative for instruction on use.

<sup>9</sup> Geometry constant for Lubrication Life Adjustment Factor  $a_3$ .

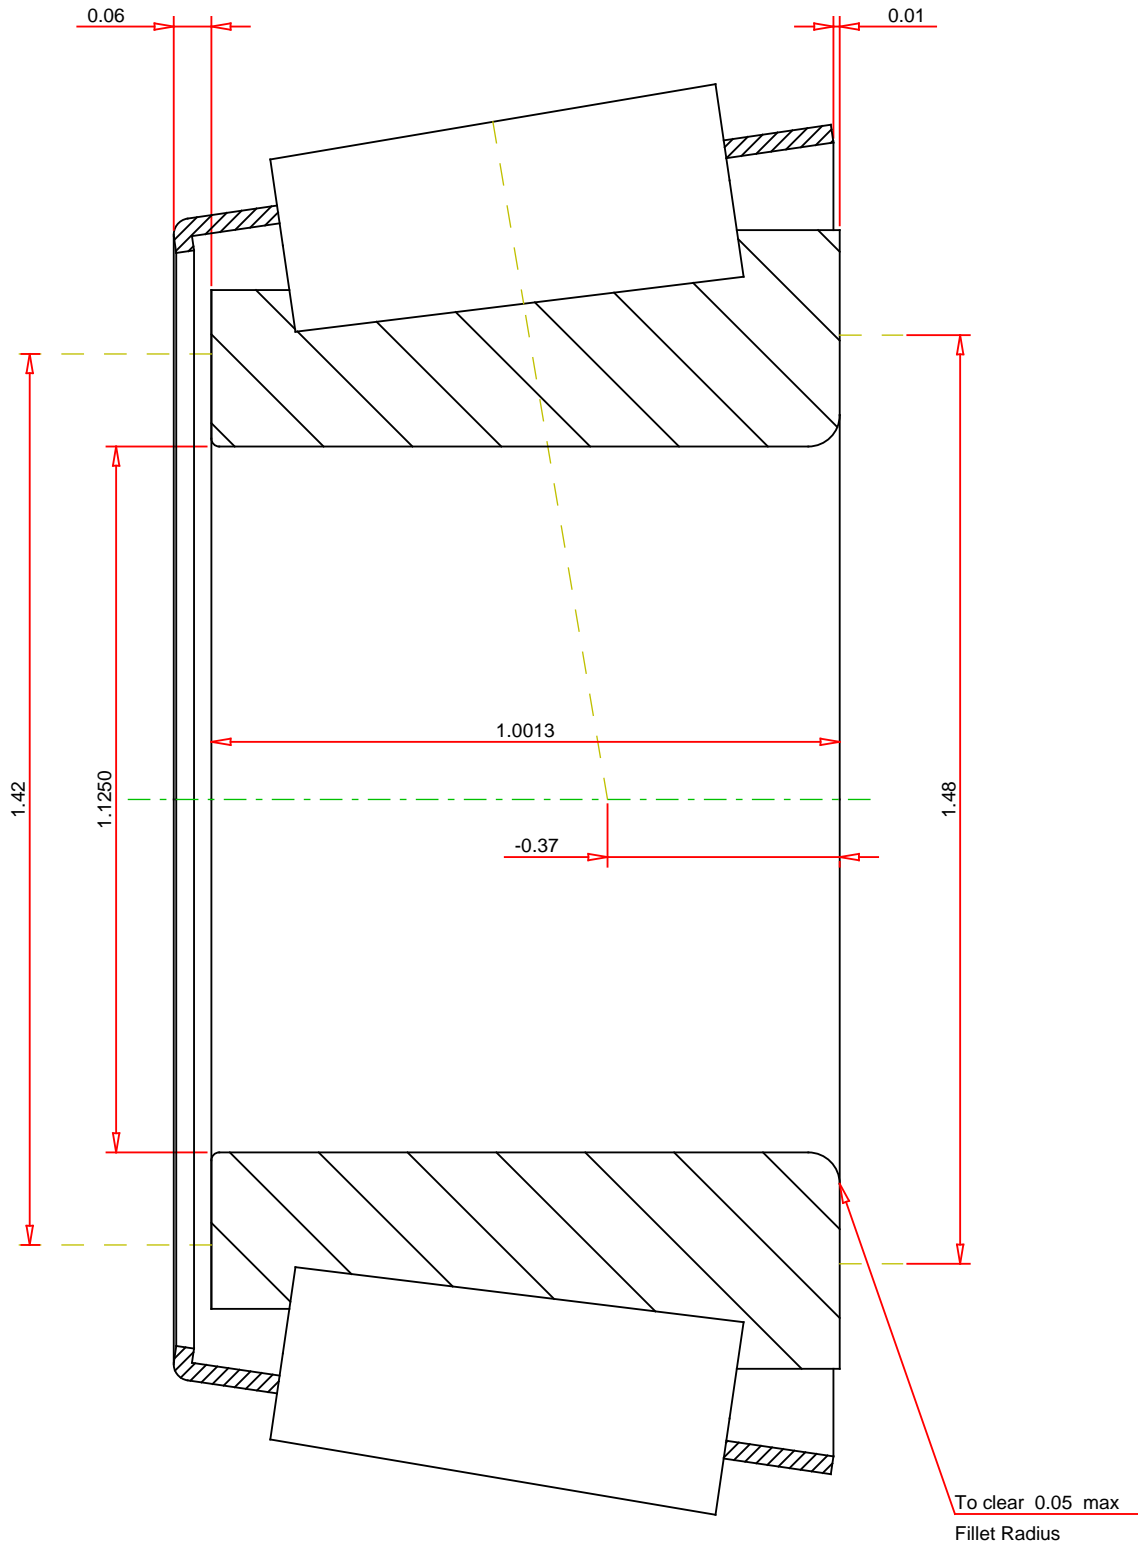

IMPERIAL UNITS

<div>Number of Rollers Per Row14</div>	<div>TIMIKEN®</div> <div>THE TIMKEN COMPANY</div> <div>NORTH CANTON, OHIO USA</div>	<div>2689</div> <div>Tapered Roller Bearings - Single Cones - Imperial</div> <div><div>K Factor2.3</div><div>Dynamic Radial Rating - C904470 lbf</div><div>Dynamic Thrust Rating - Ca901940 lbf</div><div>Dynamic Radial Rating - C117200 lbf</div></div>
--	---	---