




Brand of NTN corporation

## Technical data

### UCC211

Bearing units




Grey cast housing, radial insert ball bearing with socket set screws, seal with slinger

#### KIT CONTENT

UC211G2

#### VISUAL (S)

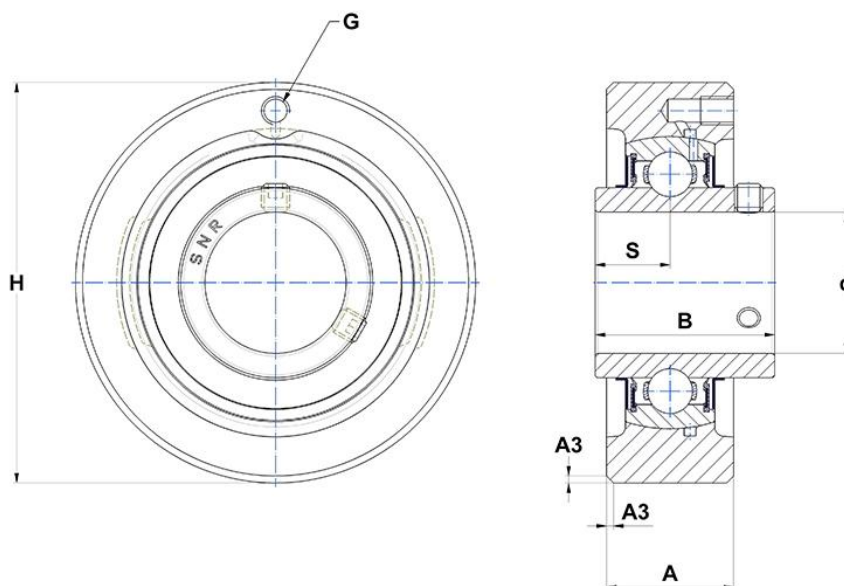

#### PRODUCT DEFINITION

|                                          |         |
|------------------------------------------|---------|
| Brand                                    | SNR     |
| A - Housing width                        | 35 mm   |
| A3 - Centering depth / chamfer dimension | 2 mm    |
| B - Width of Inner Ring                  | 55,6 mm |
| d - Shaft diameter                       | 55 mm   |
| G - Grease fitting                       | M6x1    |



**NTN Europe**

1 rue des Usines · BP 2017 · 74010 Annecy Cedex · France · Tel. +33 (0)4 50 65 30 00  
S.A. au capital de 322 639 919 € · RCS ANNECY B 325 821 072 · Id. Fiscale : FR 48 325 821 072  
SIRET 325 821 072 00015 · Code APE 2815 Z · Code NACE 28.15

### PRODUCT DEFINITION

|                                               |         |
|-----------------------------------------------|---------|
| <b>H - Housing length, width or diameter</b>  | 125 mm  |
| <b>S - Distance front side/bearing centre</b> | 22,2 mm |

### PRODUCT PERFORMANCE

|                                   |          |
|-----------------------------------|----------|
| <b>C - Dynamic load rating</b>    | 43,55 kN |
| <b>C0 - Static load rating</b>    | 29,2 kN  |
| <b>Operating temperature min.</b> | -20 °C   |
| <b>Operating temperature max.</b> | 100 °C   |

### OTHER FEATURES

|                                                    |         |
|----------------------------------------------------|---------|
| <b>Mass</b>                                        | 2,22 kg |
| <b>Recommended tightening torque for set screw</b> | 22 N-m  |

