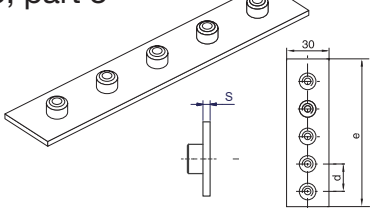




Tube clamps series B (Twin-tube clamps) – Components

DIN 3015, part 3

							 DIN 931/933			
clamp size	weld plate angled (5 clamps)				cover plate		hexagonal screws			
	APR B... Order code	dimensions: d		e	s	DP B... Order code	dimensions: b d		SS B... Order code	dimensions: d x L
1	APRB1X APRB1VZX APRB4571X	40	196	3		DPB1...*	34	6.6	SSLA2/SSB1...*	M 06x35
2	APRB2X APRB2VZX APRB24571X	58	288	5		DPB2...*	51	8.6	SSB2...*	M 08x35
3	APRB3X APRB3VZX APRB34571X	72	358	5		DPB3...*	64	8.6	SSB3...*	M 08x45
4	APRB4X APRB4VZX APRB44571X	90	446	5		DPB4...*	78	8.6	SSB4...*	M 08x50
5	APRB5X APRBVZX APRB4571X	112	558	5		DPB5...*	102	8.6	SSB5...*	M 08x60

clamp size	socket head IS B... Order code	dimensions: d x L	stacking AS B... Order code	dimensions: a m SW	locking plate ¹⁾ SB B... Order code	dim.: SW	locking washer ²⁾ US... Order code	dimensions: a b
1	ISA4...* (ISB1...*)	M 06x35	ASA0...* (ASB1...*)	20 M6 11	SBB1...*	11	USA/USB1X ³⁾	9 18
2	ISB2...*	M 08x35	ASB2...*	22 M8 12	SBB2...*	12	USB2X USB271X	11 20
3	ISB3...*	M 08x45	ASB3...*	30 M8 12				
4	ISB4...*	M 08x50	ASB4...*	35 M8 12				
5	ISB5...*	M 08x60	ASB5...*	47 M8 12				

¹⁾ The use of stacking screws necessitates the use of locking plates in the construction assembly!

²⁾ When assembling solid rubber clamps, covering plates, hexagon screws and locking washers must be used.

³⁾ Material = Stainless steel 1.4571

*Please add the suffix below according to the surface/material required.

Order code suffixes		
Surface/material	Suffix	Example
Steel, zinc plated, Cr(VI)-free	X	DPB1X
Stainless Steel 1.4571	71X	DPB14571X