



The Timken Company

4500 Mt Pleasant St. NW


N. Canton, OH 44720

Phone: (234) 262-3000

E-Mail: CustomerCAD@timken.com • **Web site:** www.timken.com

Part Number 19143, Tapered Roller Bearings - Single Cones - Imperial

This is the most basic and most widely used type of tapered roller bearing. It consists of two main separable parts: the cone (inner ring) assembly and the cup (outer ring). It is typically mounted in opposing pairs on a shaft.

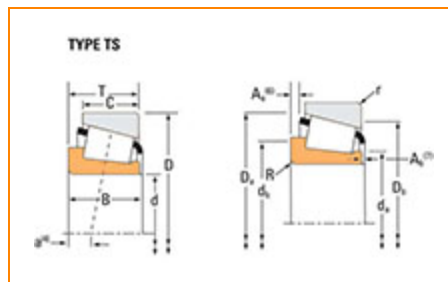

[Specifications](#) | [Dimensions](#) | [Abutment and Fillet Dimensions](#) | [Basic Load Ratings](#) | [Factors](#)

Specifications

Series	19000
Cone Part Number	19143
Design Units	Imperial
Cage Type	Stamped Steel
C1 - Dynamic Radial Rating (Two-Row, 1 million revolutions)¹	19800 lbf 88300 N
C90(2) - Dynamic Radial Rating (Two-Row, 90 million revolutions)²	5150 lbf 22900 N



Dimensions

d - Cone Bore	1 7/16 in 36.513 mm
----------------------	------------------------

B - Cone Width	0.6504 in 16.520 mm
-----------------------	------------------------

Abutment and Fillet Dimensions

R - Cone Backface "To Clear" Radius³	0.060 in 1.5 mm
--	--------------------

da - Cone Frontface Backing Diameter	1.63 in 41.5 mm
---	--------------------

db - Cone Backface Backing Diameter	1.73 in 44 mm
--	------------------

Ab - Cage-Cone Frontface Clearance	0.09 in 2.3 mm
---	-------------------

Aa - Cage-Cone Backface Clearance	0.03 in 0.8 mm
--	-------------------

a - Effective Center Location⁴	-0.06 in -1.5 mm
--	---------------------

Basic Load Ratings

C90 - Dynamic Radial Rating (90 million revolutions)⁵	2960 lbf 13100 N
---	---------------------

C1 - Dynamic Radial Rating (1 million revolutions)⁶	11400 lbf 50700 N
---	----------------------

C0 - Static Radial Rating	13000 lbf 57800 N
----------------------------------	----------------------

C_{a90} - Dynamic Thrust Rating (90 million revolutions)⁷	2250 lbf 10000 N
---	---------------------

Factors

K - Factor⁸	1.31
G1 - Heat Generation Factor (Roller-Raceway)	17.5
G2 - Heat Generation Factor (Rib-Roller End)	11.5
Cg - Geometry Factor⁹	0.0694

¹ Based on 1×10^6 revolutions L_{10} life, for the ISO life calculation method.

² Based on 90×10^6 revolutions L_{10} life, for The Timken Company life calculation method. C_{90} and C_{a90} are radial and thrust values for a single-row, $C_{90(2)}$ is the two-row radial value.

³ These maximum fillet radii will be cleared by the bearing corners.

⁴ Negative value indicates effective center inside cone backface.


⁵ Based on 90×10^6 revolutions L_{10} life, for The Timken Company life calculation method. C_{90} and C_{a90} are radial and thrust values.

⁶ Based on 1×10^6 revolutions L_{10} life, for the ISO life calculation method.

⁷ Based on 90×10^6 revolutions L_{10} life, for The Timken Company life calculation method. C_{90} and C_{a90} are radial and thrust values for a single-row, $C_{90(2)}$ is the two-row radial value.

⁸ These factors apply for both inch and metric calculations. Consult your Timken representative for instruction on use.

⁹ Geometry constant for Lubrication Life Adjustment Factor a_3 .

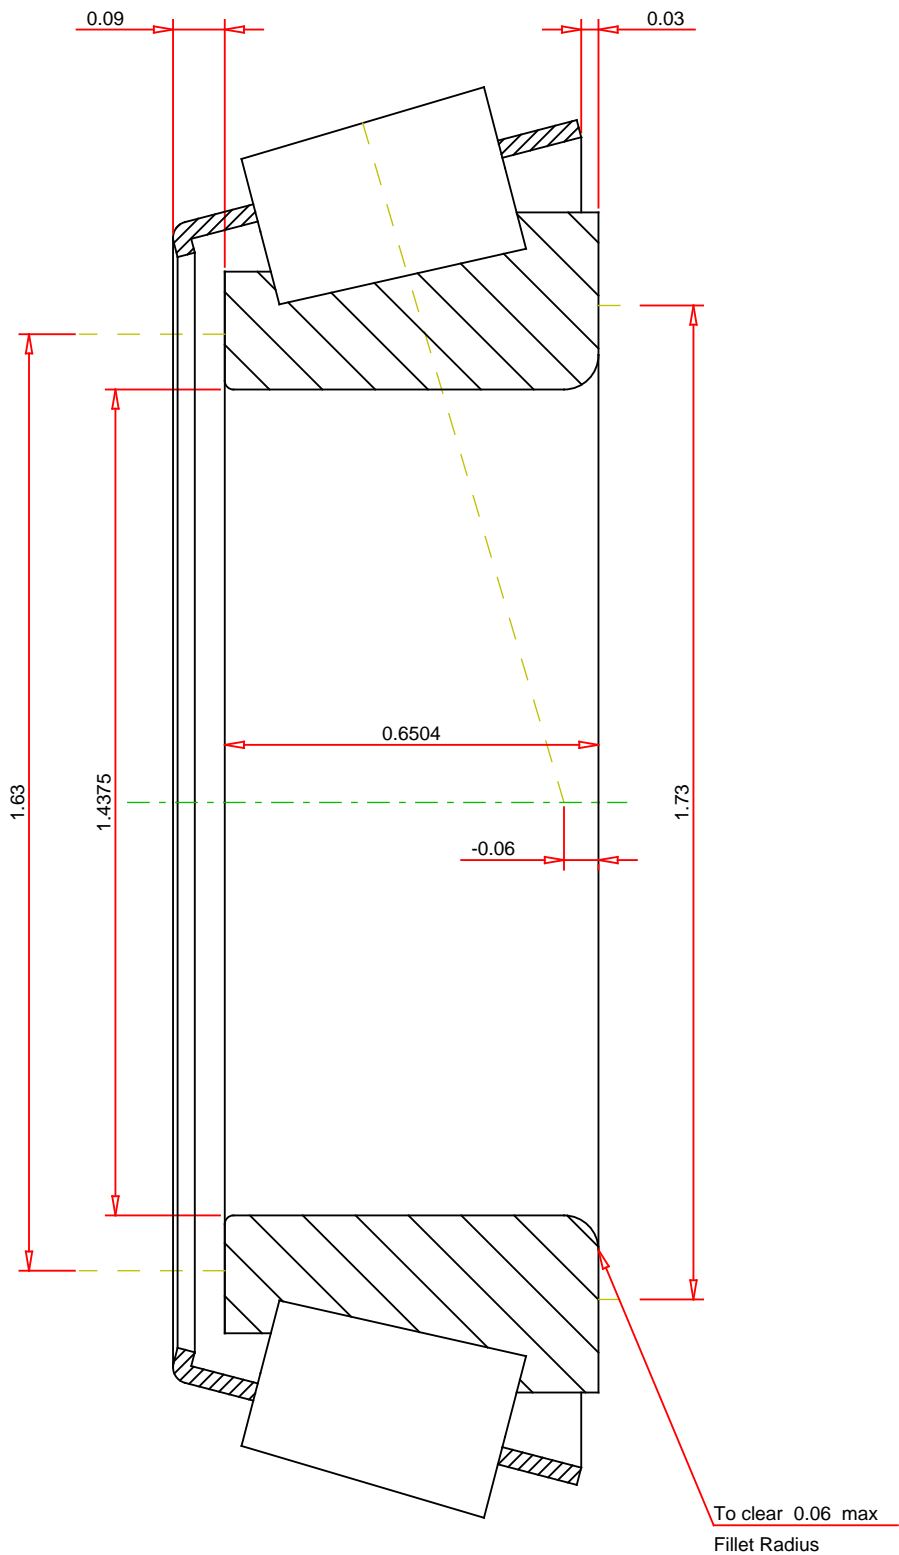

IMPERIAL UNITS

<div>Number of Rollers Per Row20</div>	<div>TIMKEN®</div> <div>THE TIMKEN COMPANY NORTH CANTON, OHIO USA</div>	<div>19143 Tapered Roller Bearings - Single Cones - Imperial</div> <div><div>K Factor1.31</div><div>Dynamic Radial Rating - C902960 lbf</div><div>Dynamic Thrust Rating - Ca902250 lbf</div><div>Dynamic Radial Rating - C111400 lbf</div></div>
--	---	--