



The Timken Company

4500 Mt Pleasant St. NW


N. Canton, OH 44720

Phone: (234) 262-3000

E-Mail: CustomerCAD@timken.com • Web site: www.timken.com

Part Number 597X - 592A, Tapered Roller Bearings - TS (Tapered Single) Imperial

This is the most basic and most widely used type of tapered roller bearing. It consists of two main separable parts: the cone (inner ring) assembly and the cup (outer ring). It is typically mounted in opposing pairs on a shaft.

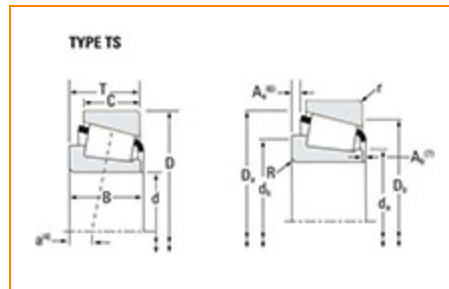

[Specifications](#) | [Dimensions](#) | [Abutment and Fillet Dimensions](#) | [Basic Load Ratings](#) | [Factors](#)

Specifications

| | |
|------------------|------------------|
| Series | 595 |
| Cone Part Number | 597X |
| Cup Part Number | 592A |
| Design Units | Imperial |
| Bearing Weight | 2.7 Kg 5.9 lb |
| Cage Type | Stamped Steel |

Dimensions

| | |
|----------|--------------------|
| d - Bore | 90 mm 3.5433 in |
|----------|--------------------|

| | |
|-------------------------------|-------------------------|
| D - Cup Outer Diameter | 152.400 mm 6.0000 in |
| B - Cone Width | 36.322 mm 1.4300 in |
| C - Cup Width | 30.163 mm 1.1875 in |
| T - Bearing Width | 39.688 mm 1.5625 in |

Abutment and Fillet Dimensions

| | |
|--|----------------------|
| R - Cone Backface "To Clear" Radius¹ | 3.050 mm 0.12 in |
| r - Cup Backface "To Clear" Radius² | 3.3 mm 0.130 in |
| da - Cone Frontface Backing Diameter | 99.06 mm 4.61 in |
| db - Cone Backface Backing Diameter | 103.89 mm 4.09 in |
| Da - Cup Frontface Backing Diameter | 145.03 mm 5.71 in |
| Db - Cup Backface Backing Diameter | 134.87 mm 5.31 in |
| Ab - Cage-Cone Frontface Clearance | 2.3 mm 0.09 in |
| Aa - Cage-Cone Backface Clearance | 3.8 mm 0.15 in |
| a - Effective Center Location³ | -2.5 mm -0.1 in |

Basic Load Ratings

| | |
|---|-----------------------|
| C90 - Dynamic Radial Rating (90 million revolutions)⁴ | 12600 lbf 56000 N |
| C1 - Dynamic Radial Rating (1 million revolutions)⁵ | 48600 lbf 216000 N |
| C0 - Static Radial Rating | 71600 lbf 319000 N |
| C_{a90} - Dynamic Thrust Rating (90 million revolutions)⁶ | 9530 lbf 42400 N |

Factors

| | |
|---|-------|
| K - Factor⁷ | 1.32 |
| e - ISO Factor⁸ | 0.44 |
| Y - ISO Factor⁹ | 1.36 |
| G1 - Heat Generation Factor (Roller-Raceway) | 151 |
| G2 - Heat Generation Factor (Rib-Roller End) | 38.3 |
| Cg - Geometry Factor¹⁰ | 0.142 |

¹ These maximum fillet radii will be cleared by the bearing corners.

² These maximum fillet radii will be cleared by the bearing corners.

³ Negative value indicates effective center inside cone backface.

⁴ Based on 90×10^6 revolutions L_{10} life, for The Timken Company life calculation method. C_{90} and C_{a90} are radial and thrust values.

⁵ Based on 1×10^6 revolutions L_{10} life, for the ISO life calculation method.


⁶ Based on 90×10^6 revolutions L_{10} life, for The Timken Company life calculation method. C_{90} and C_{a90} are radial and thrust values for a single-row, $C_{90(2)}$ is the two-row radial value.

⁷ These factors apply for both inch and metric calculations. Consult your Timken representative for instruction on use.

⁸ These factors apply for both inch and metric calculations. Consult your Timken representative for instruction on use.

⁹ These factors apply for both inch and metric calculations. Consult your Timken representative for instruction on use.

¹⁰ Geometry constant for Lubrication Life Adjustment Factor a_{3l}.

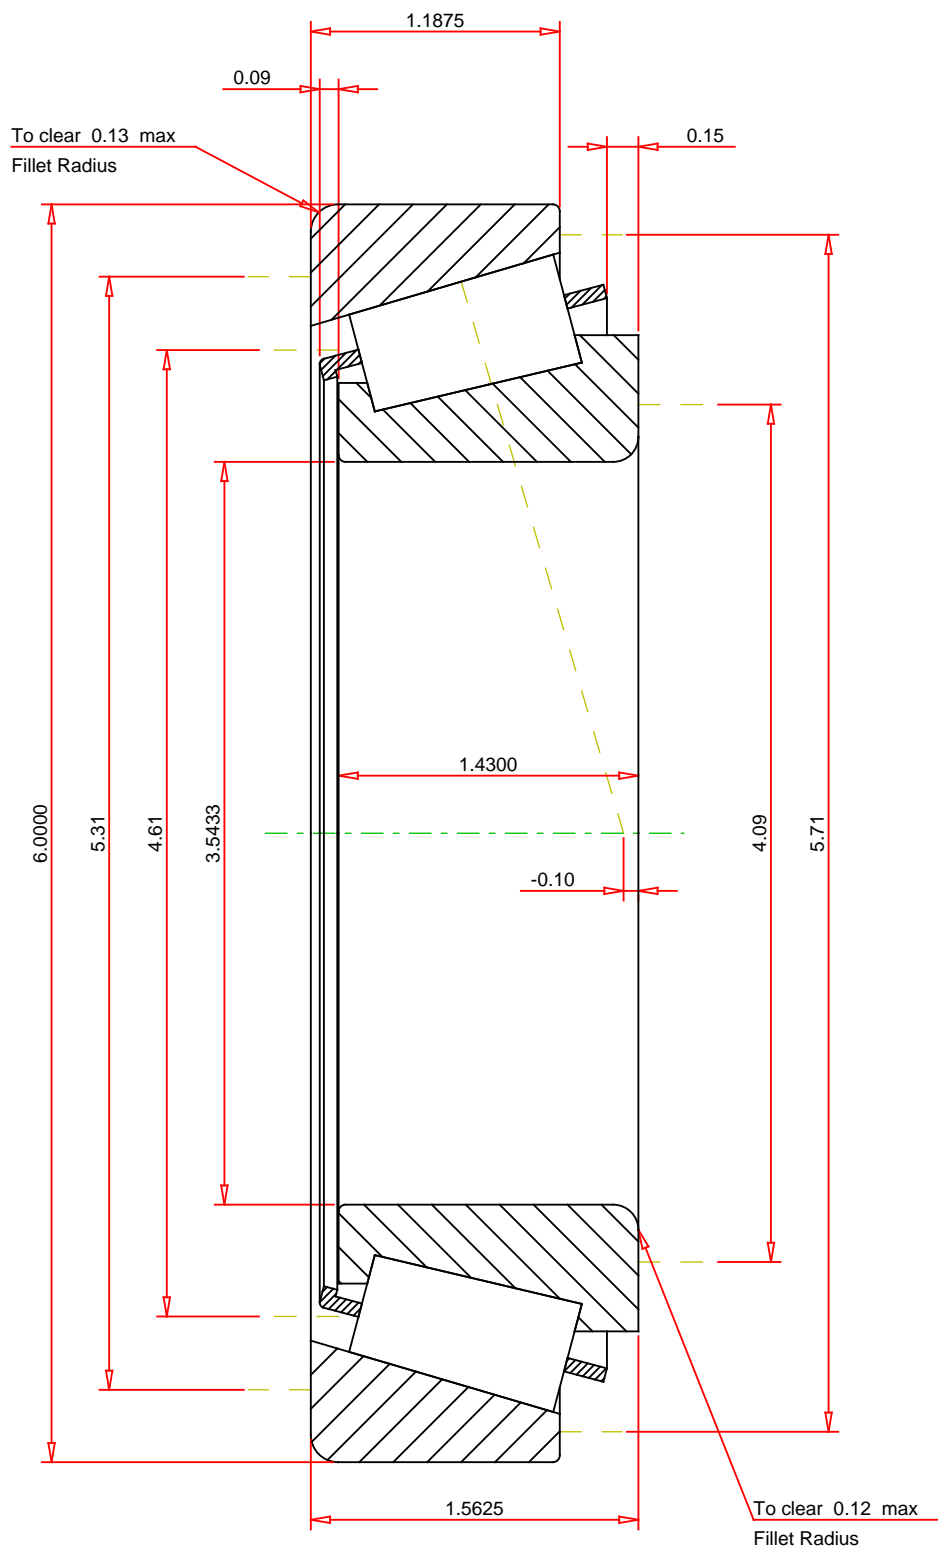

IMPERIAL UNITS

| | |
|---------------------------|-----------|
| ISO Factor - e | 0.44 |
| ISO Factor - Y | 1.36 |
| Bearing Weight | 5.9 lb |
| Number of Rollers Per Row | 24 |
| Effective Center Location | -0.1 inch |

TIMKEN®

THE TIMKEN COMPANY
NORTH CANTON, OHIO USA

597X - 592A TS BEARING ASSEMBLY

| | |
|------------------------------|-----------|
| K Factor | 1.32 |
| Dynamic Radial Rating - C90 | 12600 lbf |
| Dynamic Thrust Rating - Ca90 | 9530 lbf |
| Static Radial Rating - C0 | 71600 lbf |
| Dynamic Radial Rating - C1 | 48600 lbf |

Every reasonable effort has been made to ensure the accuracy of the information contained in this writing, but no liability is accepted for errors, omissions or for any other reason.

FOR DISCUSSION ONLY