

Hydraulic Wedgie and Spread Cylinders

▼ Shown clockwise from top: **WR-15, WR-5, A-92**



A, WR Series

Capacity:

0.75-1.00 ton

Tip Clearance:

0.50-1.38 inches

Maximum Spread Range:

3.70-11.50 inches

Maximum Operating Pressure:

10,000 psi



RC-Series DUO Cylinders

10 ton RC-Series DUO cylinders (except RC-101) fit into A-92 Spreader Attachment.

Page: 6




Best Match Hand Pump


To power your WR5 and WR15 the **P-392** hand pump is an ideal choice.

Page: 70


- Single-acting, spring return
- **WR-15:** For long stroke spreading applications
- **WR-5:** For use in very confined work areas
- **A-92:** Spreader attachment screws onto RC-Series 10-ton cylinders (except RC-101)*



WR-5

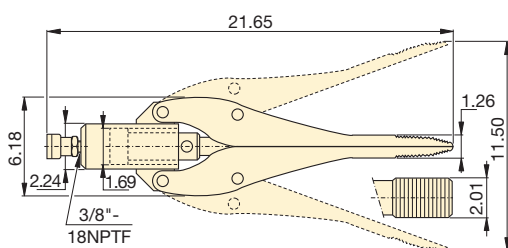

WR-15



A-92*

Spreader Capacity	Tip Clearance	Model Number	Maximum Spread	Cylinder Effective Area	Oil Capacity	Wt.
(ton)	(in)		(in)	(in ²)	(in ³)	(lbs)
1.00	.50	WR-5	3.70	1.00	.61	5.0
.75	1.26	WR-15	11.50	2.25	3.91	25.0
1.00	1.38	A-92*	6.25	—	—	8.0

* Maximum system pressure must be limited to half the rated pressure (5000 psi)

▼ A WR-5 Wedgie cylinder is used to loosen a bridge bearing.

