

Direct Air Operated 2 Port Valve For Air, Gas, Vacuum, Water and Oil **Series VXA21/22**

The VX* series will be revised shortly.

How to Order

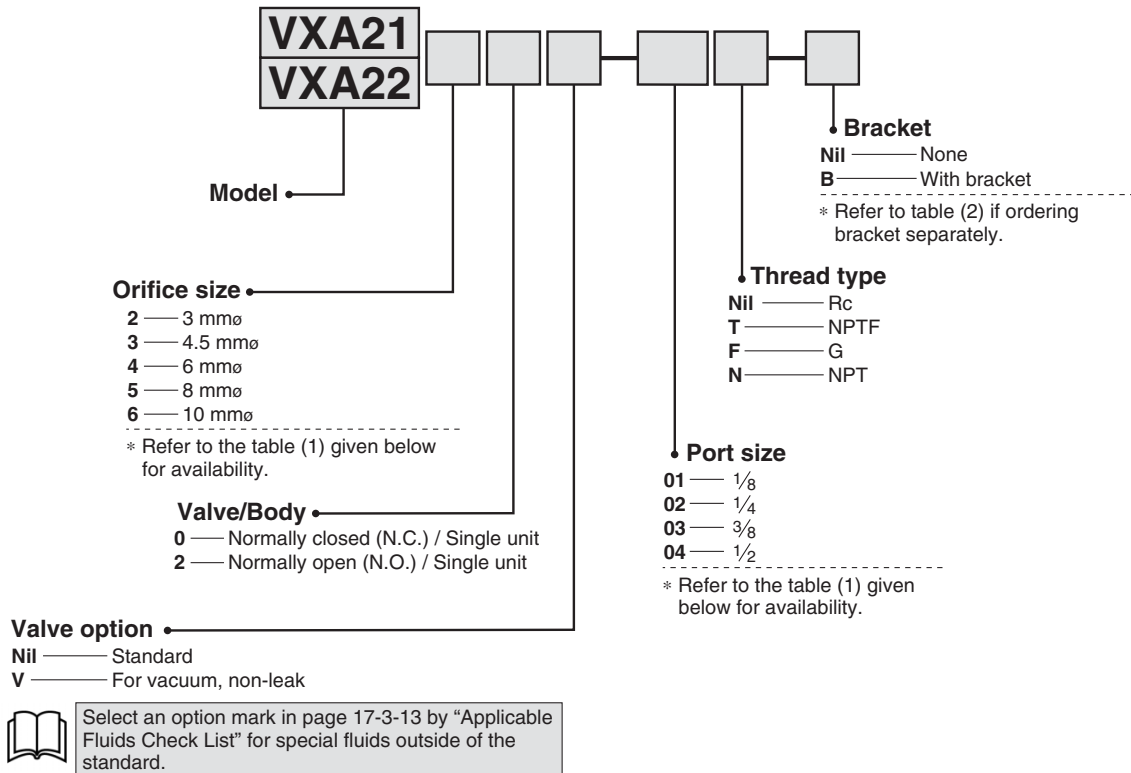


Table (1) Port/Orifice Size

Model		Orifice size (No.)				
VXA21	VXA22	2 (3 mmø)	3 (4.5 mmø)	4 (6 mmø)	5 (8 mmø)	6 (10 mmø)
01 (1/8)	—	●	●	—	—	—
02 (1/4)	—	●	●	—	—	—
—	02 (1/4)	—	●	●	●	●
—	03 (3/8)	—	●	●	●	●
—	04 (1/2)	—	—	—	—	●

Table (2) Bracket Part No.

Model	Part no.
VXA212□ VXA213□	VX070-020
VXA223□ VXA224□	VX070-022
VXA225□ VXA226□	VX070-029

Ordering example

(Example) Series VXA21, Orifice size 4.5 mmø, Normally closed, Rc 1/4
(Part no.) **VXA2130-02**

VC□

VDW

VQ

VX2

VX□

VX3

VXA

VN□

LVC

LVA

LVH

LVD

LVQ

LQ

LVN

TI/
TIL


PA

PAX

PB

Dimensions (Orifice Size: 3 mmø, 4.5 mmø, 6 mmø)


VXA212□/VXA213□/VXA223□/VXA224□

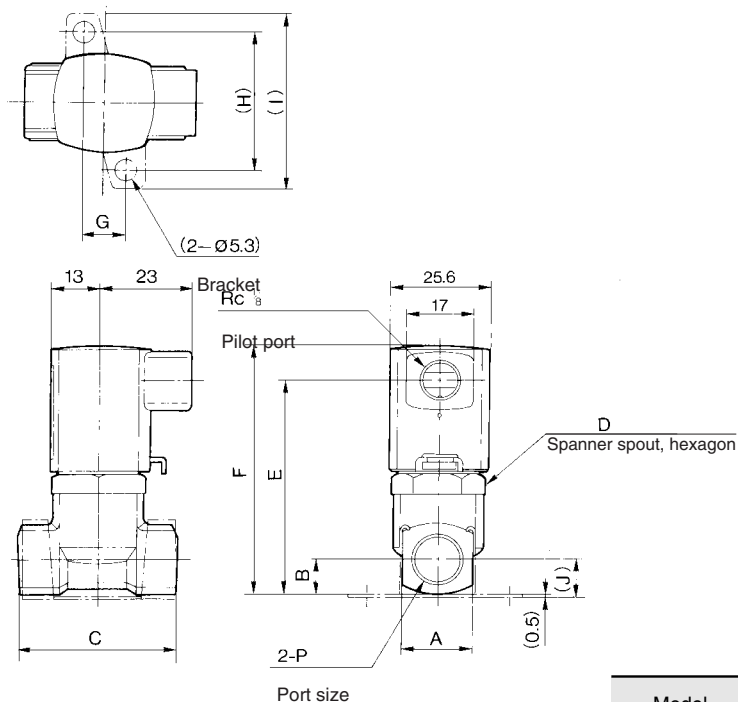


Model	Port size P Rc	A	B	C	D	E	F	With bracket			
								G	H	I	J
VXA21	1/8, 1/4	18	9	40	21	55	64	11	36	46	10
VXA22	1/4, 3/8	21	10.5	45	27	62	71	13	46	56	11.5

Dimensions (Orifice Size: 8 mmø, 10 mmø)

VXA225□/VXA226□

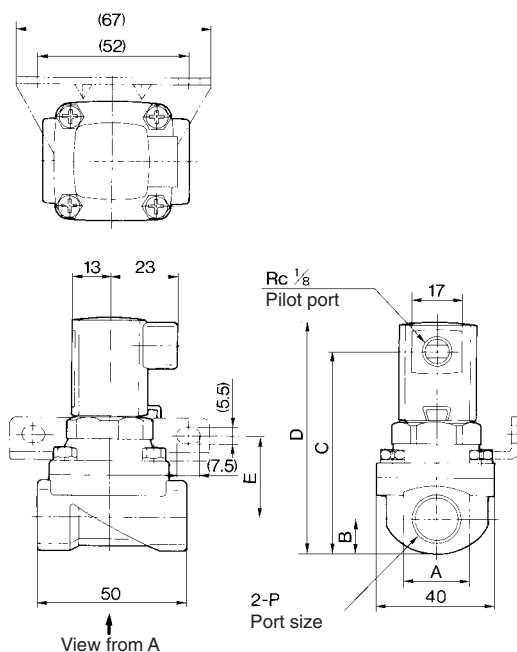

Thread fixed:
(VXA226²-04 only)



Dimension of view from A

Model	Port size P Rc	A	B	C	D	With bracket
						E
VXA22 ^{52 02 60 03}	1/4, 3/8	22	11	67	77	27
VXA226 ² -04*	1/2	28	14.5	73	83	30



* Fixing with thread is also possible.