



Self-Lube[®] triple seal bearing inserts

T1000G Series

T1000G

With spherical outside diameter and integral set screw lock

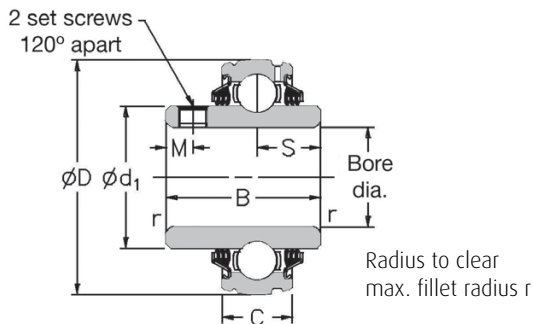

Shaft diameter		RHP designation	Dimensions (mm)						ISO Load ratings		Rec. max. speed rev/min	Mass (approx.) kg	
mm	inches		D	C	B	s	d1	M	r	dynamic Cr newtons			static Cor newtons
25		T1025-25G	52.000	15.00	34.10	14.33	34.00	5.00	1.00	14000	7880	1000	0.17
	7⁄8	T1025-7⁄8G											
	15⁄16	T1025-15⁄16G											
	1	T1025-1G											
25		T1030-25G	62.000	18.00	38.10	15.93	40.30	5.00	1.00	19500	11300	850	0.37
30		T1030-30G											
	7⁄8	T1030-7⁄8G											
	1	T1030-1G											
	1 1⁄8	T1030-1 1⁄8G											
	1 3⁄16	T1030-1 3⁄16G											
	1 1⁄4	T1030-1 1⁄4G											
30		T1035-30G	72.000	19.00	42.90	17.53	46.90	6.50	1.00	25700	15300	750	0.51
35		T1035-35G											
	1 3⁄16	T1035-1 3⁄16G											
	1 1⁄4	T1035-1 1⁄4G											
	1 3⁄8	T1035-1 3⁄8G											
	1 7⁄16	T1035-1 7⁄16G											
35		T1040-35G	80.000	21.00	49.20	19.03	52.40	8.00	1.00	32500	19900	650	0.64
40		T1040-40G											
	1 3⁄8	T1040-1 3⁄8G											
	1 7⁄16	T1040-1 7⁄16G											
	1 1⁄2	T1040-1 1⁄2G											
40		T1045-40G	85.000	22.00	49.20	19.04	57.40	8.00	1.00	32500	20500	600	0.73
45		T1045-45G											
	1 1⁄2	T1045-1 1⁄2G											
	1 5⁄8	T1045-1 5⁄8G											
	1 11⁄16	T1045-1 11⁄16G											
	1 3⁄4	T1045-1 3⁄4G											
45		T1050-45G	90.000	23.00	51.60	19.04	62.40	10.00	1.00	35000	23200	550	0.91
50		T1050-50G											
	1 11⁄16	T1050-1 11⁄16G											
	1 3⁄4	T1050-1 3⁄4G											
	1 7⁄8	T1050-1 7⁄8G											
	1 15⁄16	T1050-1 15⁄16G											
	2	T1050-2G											
50		T1055-50G	100.000	25.00	55.60	22.24	68.90	10.00	1.50	43500	29200	500	1.12
55		T1055-55G											
	1 7⁄8	T1055-1 7⁄8G											
	1 15⁄16	T1055-1 15⁄16G											
	2	T1055-2G											
	2 1⁄8	T1055-2 1⁄8G											
	2 3⁄16	T1055-2 3⁄16G											

Please check availability