


Technical data

6808JRLLB/2AS

Single row deep groove ball bearings

Deep groove ball bearing, radial contact, pressed steel cage, non-contact seals on both sides

Visual(s)

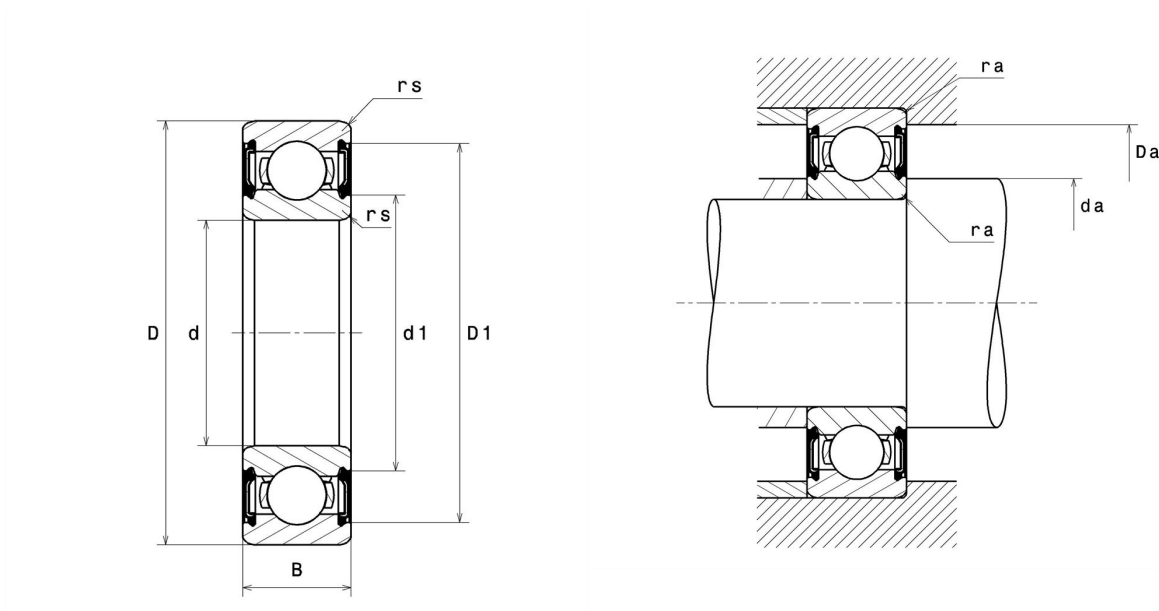

Product definition

d	40 mm
D	52 mm
B	7 mm
rs min	0.3 mm
Radial clearance class	CN
Mass	0.03 kg
Brand	NTN

Product performance

Dynamic load, C	5.1 kN
Static load, C0	4.4 kN
Fatigue limit load, Cu	0.2 kN
f0	16.3
Nlim (grease)	12,000 Tr/min
Min operating temperature, Tmin	-25 °C
Max operating temperature, Tmax	110 °C
Characteristic cage frequency, FTF	0.46 Hz
Characteristic rolling element frequency, BSF	13.07 Hz
Characteristic outer ring frequency, BPF0	10.16 Hz
Characteristic inner ring frequency, BPFI	11.84 Hz

Abutment dimensions

da min	42 mm
da max	43 mm
Da max	50 mm
ra max	0.3 mm

Calculation factors

Equivalent dynamic radial load

$$P = X.F_r + Y.F_a$$

$\frac{f_0 F_a}{C_0}$	e	Fa / Fr ≤ e		Fa / Fr > e	
		X	Y	X	Y
0.172	0.19	1	0	0.56	2.3
0.345	0.22				1.99
0.689	0.26				1.71
1.03	0.28				1.55
1.38	0.3				1.45
2.07	0.34				1.31
3.45	0.38				1.15
5.17	0.42				1.04
6.89	0.44				1

Equivalent static radial load

$$P_0 = X_0.F_r + Y_0.F_a$$

X_0	Y_0
0.6	0.5

For single or DT bearing arrangement:

If $P_0 < F_r$, then use $P_0 = F_r$