


**The Timken Company**

4500 Mt Pleasant St. NW


N. Canton, OH 44720

**Phone:** (234) 262-3000

**E-Mail:** [CustomerCAD@timken.com](mailto:CustomerCAD@timken.com) • **Web site:** [www.timken.com](http://www.timken.com)

## Part Number 5595, Tapered Roller Bearings - Single Cones - Imperial

This is the most basic and most widely used type of tapered roller bearing. It consists of two main separable parts: the cone (inner ring) assembly and the cup (outer ring). It is typically mounted in opposing pairs on a shaft.

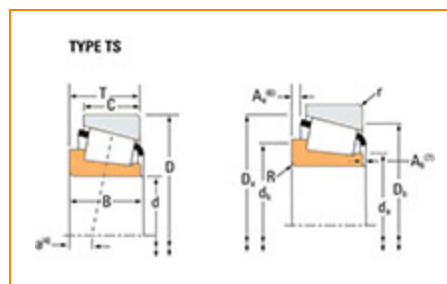

[Specifications](#) | [Dimensions](#) | [Abutment and Fillet Dimensions](#) | [Basic Load Ratings](#) | [Factors](#)

### Specifications

<b>Series</b>	5500
<b>Cone Part Number</b>	5595
<b>Design Units</b>	Imperial
<b>Cage Type</b>	Stamped Steel
<b>C1 - Dynamic Radial Rating (Two-Row, 1 million revolutions)<sup>1</sup></b>	110000 lbf 488000 N
<b>C90(2) - Dynamic Radial Rating (Two-Row, 90 million revolutions)<sup>2</sup></b>	28400 lbf 127000 N



Dimensions

<b>d - Cone Bore</b>	2.5938 in 65.883 mm
----------------------	------------------------

<b>B - Cone Width</b>	1.7230 in 43.764 mm
-----------------------	------------------------

## Abutment and Fillet Dimensions

<b>R - Cone Backface "To Clear" Radius<sup>3</sup></b>	0.140 in 3.6 mm
--	--------------------

<b>da - Cone Frontface Backing Diameter</b>	3.03 in 77 mm
---	------------------

<b>db - Cone Backface Backing Diameter</b>	3.27 in 83 mm
--	------------------

<b>Ab - Cage-Cone Frontface Clearance</b>	0.08 in 2 mm
---	-----------------

<b>Aa - Cage-Cone Backface Clearance</b>	0.07 in 1.8 mm
--	-------------------

<b>a - Effective Center Location<sup>4</sup></b>	-0.48 in -12.2 mm
--	----------------------

## Basic Load Ratings

<b>C90 - Dynamic Radial Rating (90 million revolutions)<sup>5</sup></b>	16300 lbf 72700 N
---	----------------------

<b>C1 - Dynamic Radial Rating (1 million revolutions)<sup>6</sup></b>	63000 lbf 280000 N
---	-----------------------

<b>C0 - Static Radial Rating</b>	73500 lbf 327000 N
----------------------------------	-----------------------

<b>C<sub>a90</sub> - Dynamic Thrust Rating (90 million revolutions)<sup>7</sup></b>	10000 lbf 44600 N
---	----------------------

## Factors

<b>K - Factor<sup>8</sup></b>	1.63
<b>G1 - Heat Generation Factor (Roller-Raceway)</b>	110
<b>G2 - Heat Generation Factor (Rib-Roller End)</b>	24.2
<b>Cg - Geometry Factor<sup>9</sup></b>	0.0825

<sup>1</sup> Based on  $1 \times 10^6$  revolutions  $L_{10}$  life, for the ISO life calculation method.

<sup>2</sup> Based on  $90 \times 10^6$  revolutions  $L_{10}$  life, for The Timken Company life calculation method.  $C_{90}$  and  $C_{a90}$  are radial and thrust values for a single-row,  $C_{90(2)}$  is the two-row radial value.

<sup>3</sup> These maximum fillet radii will be cleared by the bearing corners.

<sup>4</sup> Negative value indicates effective center inside cone backface.


<sup>5</sup> Based on  $90 \times 10^6$  revolutions  $L_{10}$  life, for The Timken Company life calculation method.  $C_{90}$  and  $C_{a90}$  are radial and thrust values.

<sup>6</sup> Based on  $1 \times 10^6$  revolutions  $L_{10}$  life, for the ISO life calculation method.

<sup>7</sup> Based on  $90 \times 10^6$  revolutions  $L_{10}$  life, for The Timken Company life calculation method.  $C_{90}$  and  $C_{a90}$  are radial and thrust values for a single-row,  $C_{90(2)}$  is the two-row radial value.

<sup>8</sup> These factors apply for both inch and metric calculations. Consult your Timken representative for instruction on use.

<sup>9</sup> Geometry constant for Lubrication Life Adjustment Factor  $a_3$ .

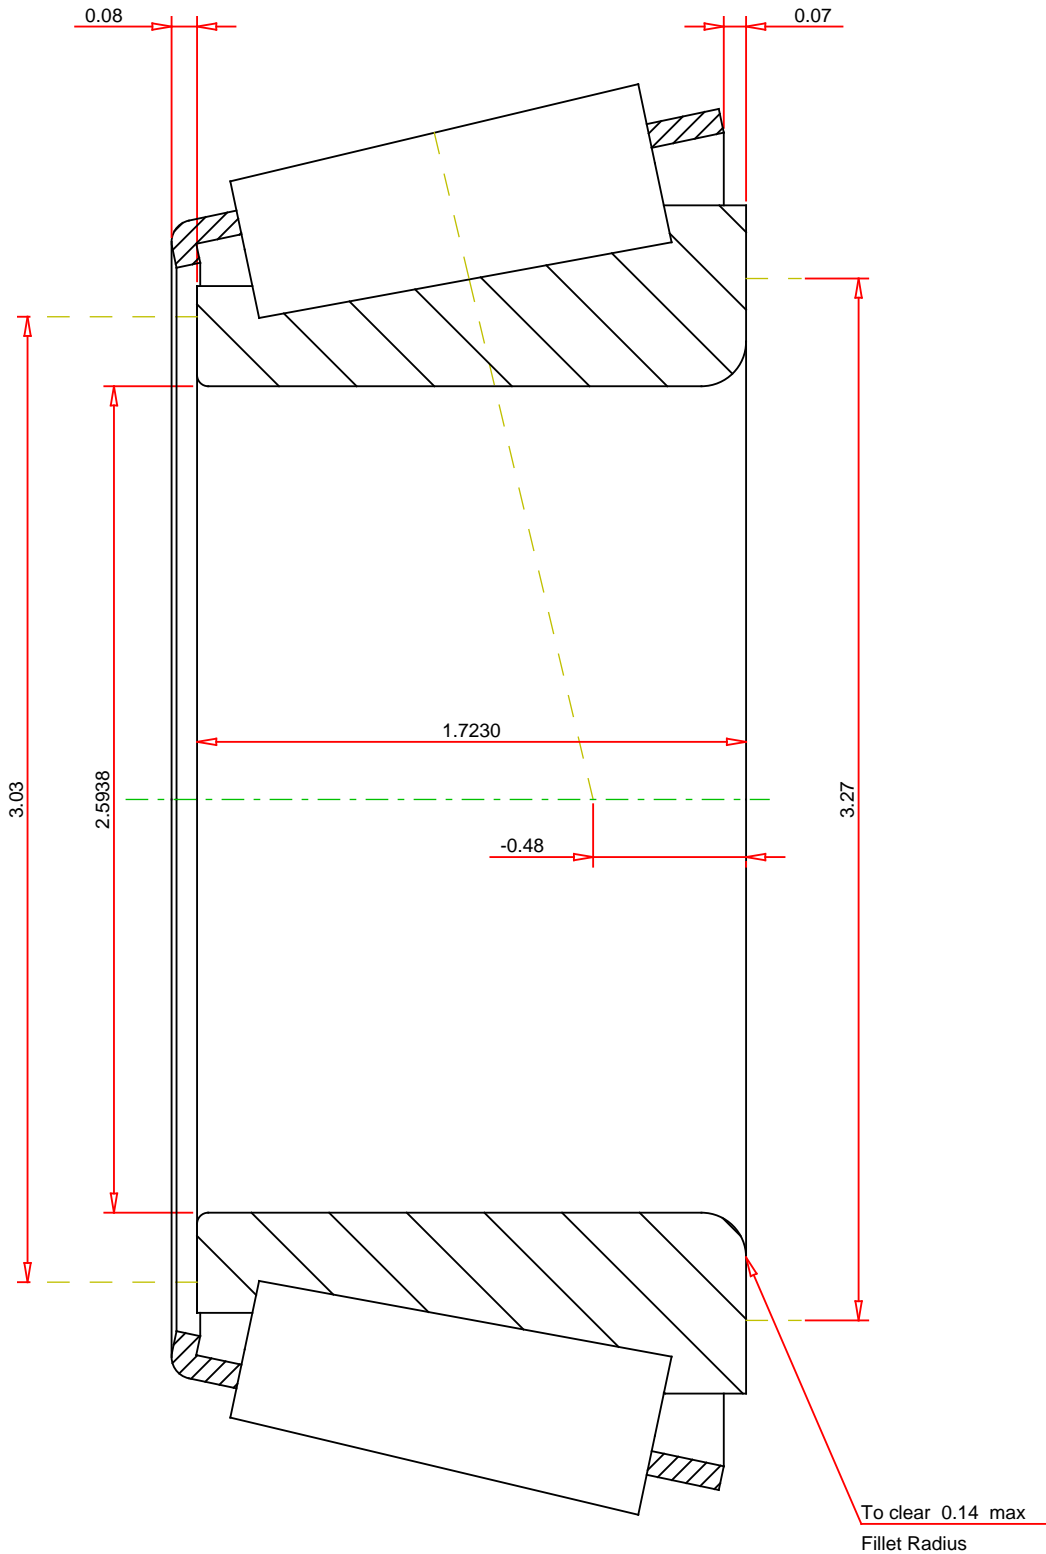

IMPERIAL UNITS

<div>Number of Rollers Per Row19</div>	<div>TIMKEN®</div> <div>THE TIMKEN COMPANY</div> <div>NORTH CANTON, OHIO USA</div>	<div>5595</div> <div>Tapered Roller Bearings - Single Cones - Imperial</div> <div><div>K Factor1.63</div><div>Dynamic Radial Rating - C9016300lbf</div><div>Dynamic Thrust Rating - Ca9010000lbf</div><div>Dynamic Radial Rating - C163000lbf</div></div>
--	--	---