

Detachable Clevis (MP2 mount)

- Cylinder mounting in accordance with CNOMO / NFE 49-001

- Suitable piston Ø 0.984 1.26 1.57 1.97 2.48 3.15 3.94 4.92 6.3 7.87 inch



Standards

CNOMO / NFE 49-001

Technical data


Part No.	Piston Ø	Swivel bearing Ø
1827005910	0.984 inch	0.394 inch
1827005911	1.26 inch	0.394 inch
1827005912	1.57 inch	0.394 inch
1827005913	1.97 inch	0.394 inch
1827005914	2.48 inch	0.394 inch
1827005915	3.15 inch	0.394 inch
1827005916	3.94 inch	0.394 inch
1827005917	4.92 inch	0.394 inch
7472ZZ1428	6.3 inch	0.394 inch
7472ZZ1429	7.87 inch	0.394 inch

Scope of delivery incl. lock nut

Technical information

Material	
Material	Aluminum
	Cathodic dip-painted

Dimensions

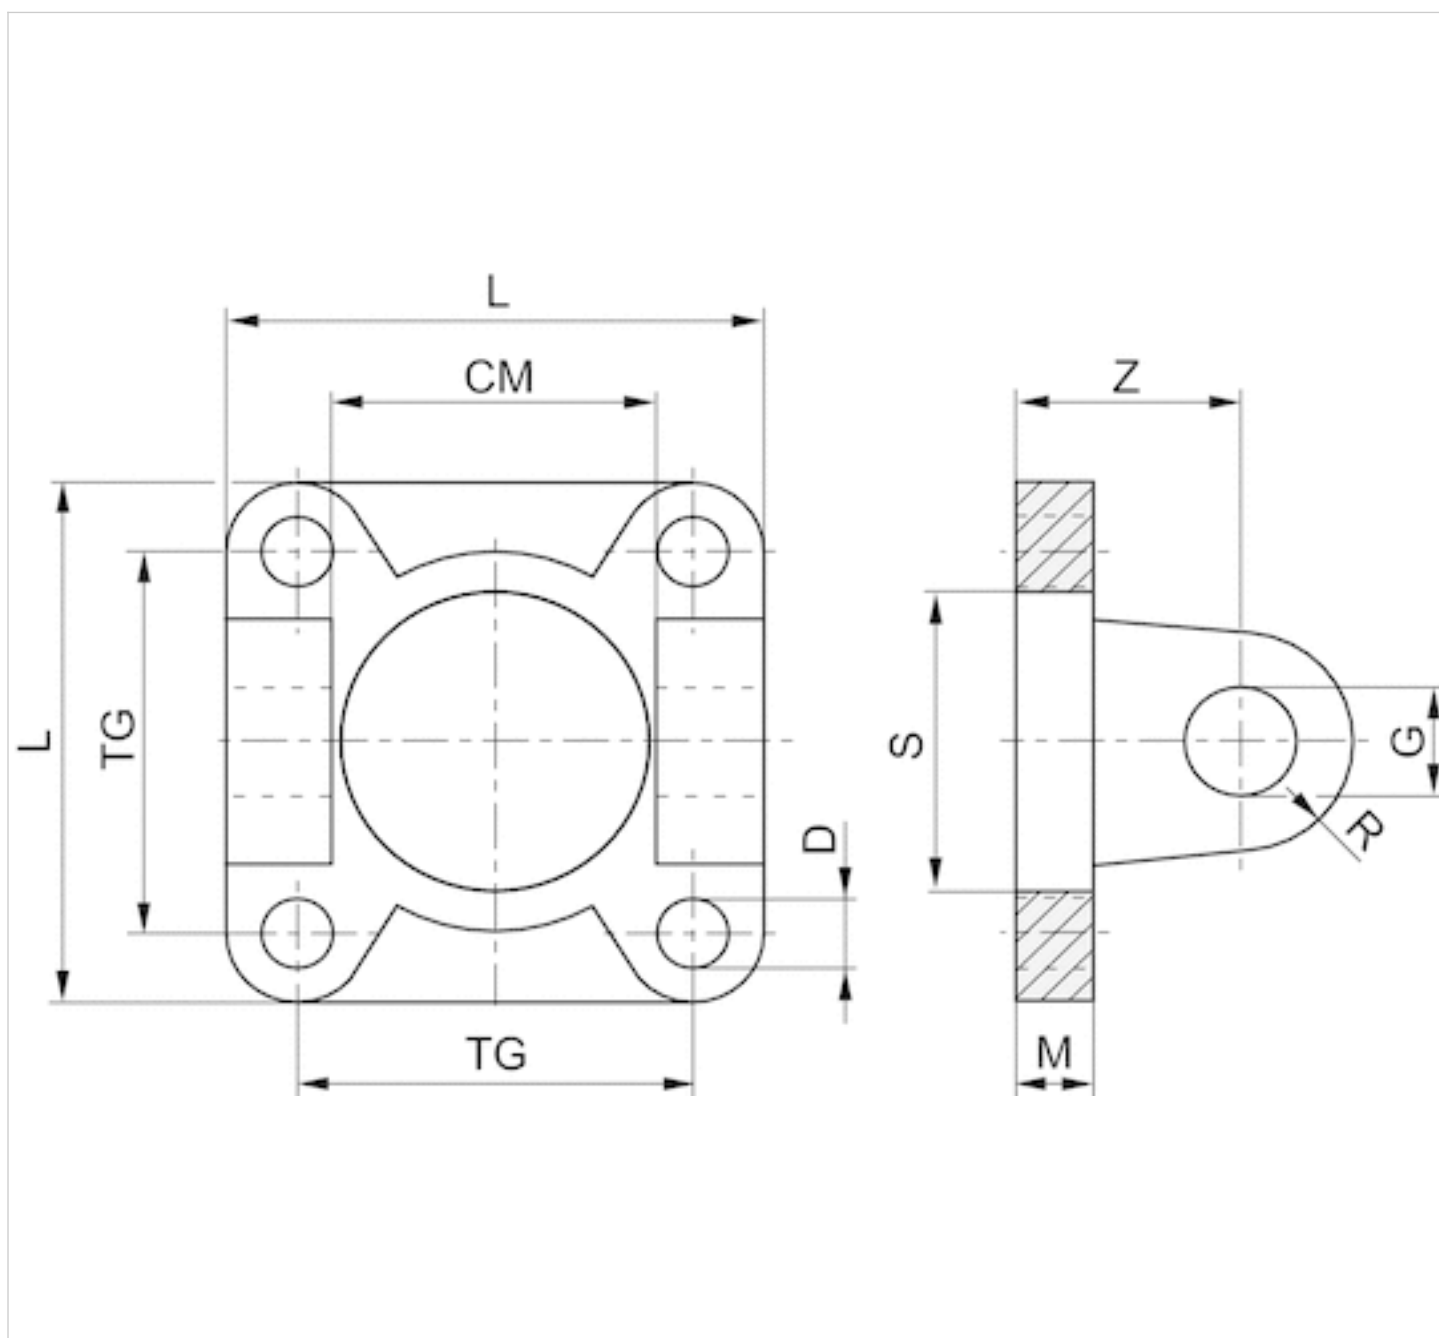

Dimensions

Part No.	Piston Ø	CM H14	D H13	G H9	M	L	R	S	TG	Z
1827005910	0.984 inch	26	7	8	8	40	8	25	28	18
1827005911	1.26 inch	26	7	8	8	45	8	25	33	18
1827005912	1.57 inch	33	7	12	8	52	12	32	40	24
1827005913	1.97 inch	33	9	12	10	65	12	32	49	26
1827005914	2.48 inch	47	9	16	10	75	16	45	59	30
1827005915	3.15 inch	47	11	16	12	95	16	45	75	32
1827005916	3.94 inch	57	11	20	12	115	20	55	90	37

Part No.	Piston Ø	CM H14	D H13	G H9	M	L	R	S	TG	Z
1827005917	4.92 inch	57	14	20	16	140	21	55	110	41
7472ZZ1428	6.3 inch	72	18	25	20	180	25	65	140	55
7472ZZ1429	7.87 inch	72	18	25	20	220	25	65	175	55