




Rear trunnion bracket Mod. I (Ø 20, 25, 32, 40)

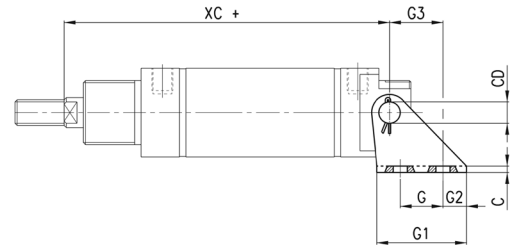

Material: zinc-plated steel

Supplied with:
1x female hinge
1x pin
2x Seeger



+ = add the stroke



DIMENSIONS												
Mod.	Ø	G	G1	G2	G3	C	XC+	AB	US	NH	CD	EW
I-27-20	20	15	30	8	18,5	1,5	77	5,5	15	20	6	12
I-27-25	25	15	33	9	20	2	78,5	6,6	18	22	8	14
I-27-32	32	15	35	10	20	2	93	6,6	20,5	25	8	16
I-27-40	40	20	42	11	25	3	96	7	26	28	10	20

Rear trunnion bracket Mod. I



Material: zinc-plated steel


Supplied with:
2x pins
2x feet

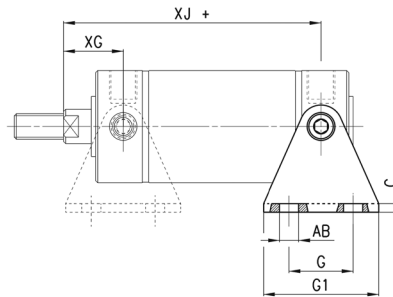



+ = add the stroke

DIMENSIONS													
Mod.	Ø	G	G1	C	XJ+	XG	AB	K1	K1	K2	K3	NH	UT
I-27-50	50	30	54	4	84	26	9	9	30,5	9	15	40	68
I-27-63	63	40	64	5	86	26	9	9	40,5	9	17,5	47	84

Rod fork end Mod. G



Material: zinc-plated steel
ISO 8140



DIMENSIONS										
Mod.	Ø	CK	LE	CM	CL	ER	CE	KK	B	B1
G-20	20	8	16	8	16	10	32	M8x1,25	22	14
G-25-32	25-32	10	20	10	20	12	40	M10x1,25	26	18
G-40	40-50	12	24	12	24	14	48	M12x1,25	32	20
G-50-63	63	16	32	16	32	19	64	M16x1,5	40	26