


Technical Data Sheet

Idler Sprockets – (Chain Tensioners)

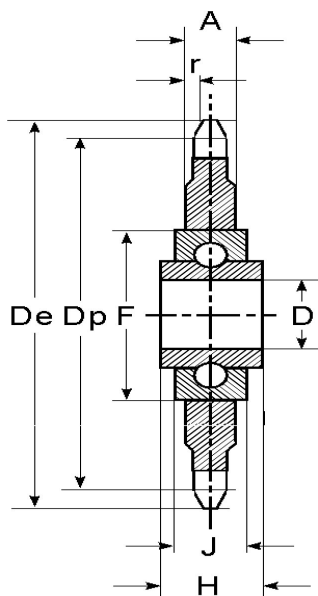

Characteristics

Manufactured from C45 Steel

All idlers are supplied with 203KRR Bearings ,
except 866216 – supplied with 204KRR Bearing



RE Code	ISO no.	Pitch h	No. Teeth	D (mm)	F (mm)	H (mm)	J (mm)	r (mm)	A (mm)	De (mm)	Dp (mm)
866211	06B1	3/8"	21	16	40	18.3	12	1	5.3	68	63.91
887673	08B1	1/2"	14	16	40	18.3	12	1.3	7.2	61.8	57.07
887670	08B1	1/2"	16	16	40	18.3	12	1.3	7.2	69.5	65.1
866212	08B1	1/2"	17	16	40	18.3	12	1.3	7.2	78	73.14
887671	08B1	1/2"	18	16	40	18.3	12	1.3	7.2	77.8	73.14
866213	10B1	5/8"	14	16	40	18.3	12	1.6	9.1	78	71.34
887674	12B1	3/4"	13	16	40	18.3	12	1.9	11.1	87.5	79.59
866214	10B1	5/8"	17	16	40	18.3	12	1.6	9.1	83	86.3
887675	10B1	5/8"	15	16	40	18.3	12	1.6	9.1	83	76.36
866215	12B1	3/4"	14	16	40	18.3	12	1.9	11.1	99.8	91.63
887672	12B1	3/4"	15	16	40	18.3	12	2.6	11.1	99.8	91.63
866216	16B1	1"	12	20	47	17.7	14	2.6	16.2	109	98.14