


Fine setting valve

- Qn = 900 l/min
- Actuating element handwheel
- Internal thread
- Poppet valve



Version	Poppet valve
Working pressure min./max.	See table below
Adjustment range min./max.	See table below
Ambient temperature min./max.	-25 ... 70 °C
Medium temperature min./max.	-25 ... 70 °C
Medium	Compressed air
Nominal flow Qn	900 l/min
Hysteresis	0.15 bar
Weight	0.6 kg

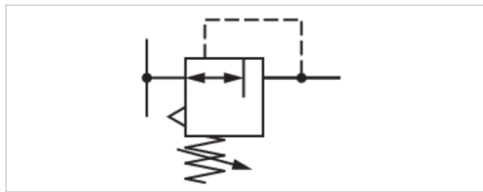

Technical data

Part No.	Compressed air connection Input	Compressed air connection type Input	Compressed air connection Output
3610607000	G 1/4	Internal thread	G 1/4
3610607100	G 1/4	Internal thread	G 1/4
3610607200	G 1/4	Internal thread	G 1/4
3610607300	G 1/4	Internal thread	G 1/4
3610607400	G 1/4	Internal thread	G 1/4
3610607500	G 1/4	Internal thread	G 1/4
3610607600	G 1/4	Internal thread	G 1/4
3610607700	G 1/4	Internal thread	G 1/4

Part No.	Working pressure min./max.	Adjustment range min./max.	Parallel pressure displacement
3610607000	0.1 ... 10 bar	0.1 ... 1.1 bar	1.3 bar
3610607100	0.1 ... 10 bar	0.1 ... 2.6 bar	1.4 bar
3610607200	0.1 ... 10 bar	0.1 ... 3.6 bar	1.4 bar
3610607300	0.1 ... 10 bar	0.1 ... 4.1 bar	1.4 bar
3610607400	0.1 ... 10 bar	0.1 ... 4.6 bar	1.4 bar
3610607500	0.1 ... 10 bar	0.1 ... 5.1 bar	1.4 bar
3610607600	0.1 ... 10 bar	0.1 ... 7.1 bar	0.8 bar
3610607700	0.1 ... 12 bar	0.1 ... 10.1 bar	-