
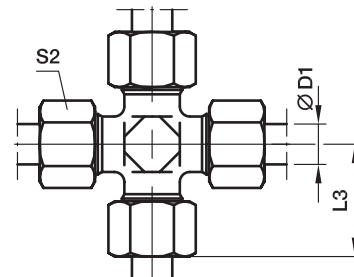


## K Union cross

EO 24° cone end

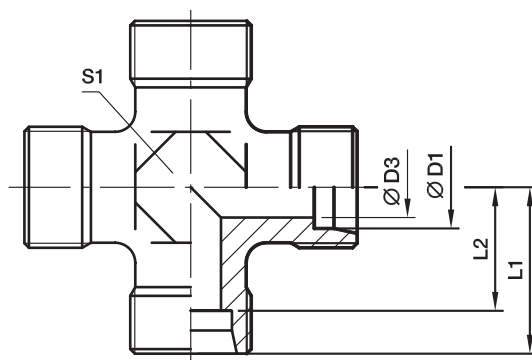

| Series           | D1 | D3   | L1 | L2   | L3 | S1 | S2 | Weight<br>g/1 piece | Order code*  | PN (bar) <sup>1)</sup> |     |     |
|------------------|----|------|----|------|----|----|----|---------------------|--------------|------------------------|-----|-----|
|                  |    |      |    |      |    |    |    |                     |              | Steel                  | 71  | MS  |
| LL <sup>2)</sup> | 04 | 3.0  | 15 | 11.0 | 21 | 9  | 10 | 13                  | <b>K04LL</b> | 100                    | 100 | 63  |
|                  | 06 | 4.5  | 15 | 9.5  | 21 | 9  | 12 | 14                  | <b>K06LL</b> | 100                    | 100 | 63  |
|                  | 08 | 6.0  | 17 | 11.5 | 23 | 12 | 14 | 24                  | <b>K08LL</b> | 100                    | 100 | 63  |
| L <sup>3)</sup>  | 06 | 4.0  | 19 | 12.0 | 27 | 12 | 14 | 35                  | <b>K06L</b>  | 315                    | 315 | 200 |
|                  | 08 | 6.0  | 21 | 14.0 | 29 | 12 | 17 | 40                  | <b>K08L</b>  | 315                    | 315 | 200 |
|                  | 10 | 8.0  | 22 | 15.0 | 30 | 14 | 19 | 52                  | <b>K10L</b>  | 315                    | 315 | 200 |
|                  | 12 | 10.0 | 24 | 17.0 | 32 | 17 | 22 | 69                  | <b>K12L</b>  | 315                    | 315 | 200 |
|                  | 15 | 12.0 | 28 | 21.0 | 36 | 19 | 27 | 130                 | <b>K15L</b>  | 315                    | 315 | 200 |
|                  | 18 | 15.0 | 31 | 23.5 | 40 | 24 | 32 | 188                 | <b>K18L</b>  | 315                    | 315 | 200 |
|                  | 22 | 19.0 | 35 | 27.5 | 44 | 27 | 36 | 251                 | <b>K22L</b>  | 160                    | 160 | 100 |
|                  | 28 | 24.0 | 38 | 30.5 | 47 | 36 | 41 | 392                 | <b>K28L</b>  | 160                    | 160 | 100 |
|                  | 35 | 30.0 | 45 | 34.5 | 56 | 41 | 50 | 618                 | <b>K35L</b>  | 160                    | 160 | 100 |
|                  | 42 | 36.0 | 51 | 40.0 | 63 | 50 | 60 | 905                 | <b>K42L</b>  | 160                    | 160 | 100 |
| S <sup>4)</sup>  | 06 | 4.0  | 23 | 16.0 | 31 | 12 | 17 | 58                  | <b>K06S</b>  | 630                    | 630 | 400 |
|                  | 08 | 5.0  | 24 | 17.0 | 32 | 14 | 19 | 82                  | <b>K08S</b>  | 630                    | 630 | 400 |
|                  | 10 | 7.0  | 25 | 17.5 | 34 | 17 | 22 | 97                  | <b>K10S</b>  | 630                    | 630 | 400 |
|                  | 12 | 8.0  | 29 | 21.5 | 38 | 17 | 24 | 146                 | <b>K12S</b>  | 630                    | 630 | 400 |
|                  | 16 | 12.0 | 33 | 24.5 | 43 | 24 | 30 | 220                 | <b>K16S</b>  | 400                    | 400 | 250 |
|                  | 20 | 16.0 | 37 | 26.5 | 48 | 27 | 36 | 339                 | <b>K20S</b>  | 315                    | 315 | 200 |
|                  | 25 | 20.0 | 42 | 30.0 | 54 | 36 | 46 | 576                 | <b>K25S</b>  | 315                    | 315 | 200 |
|                  | 30 | 25.0 | 49 | 35.5 | 62 | 41 | 50 | 843                 | <b>K30S</b>  | 315                    | 315 | 200 |
|                  | 38 | 32.0 | 57 | 41.0 | 72 | 50 | 60 | 1350                | <b>K38S</b>  | 315                    | 315 | 200 |

<sup>1)</sup> Pressure shown = item deliverable<sup>2)</sup> LL = very light series; <sup>3)</sup> L = light series; <sup>4)</sup> S = heavy seriesPN (bar)  
10 = PN (MPa)

Delivery without nut and ring. Information on ordering complete fittings see page 17.

\*Please add the **suffixes** below according to the material/surface required.

| Order code suffixes |                             |         |
|---------------------|-----------------------------|---------|
| Material            | Suffix surface and material | Example |
| Steel               | CFX                         | K16SCFX |
| Stainless Steel     | 71X                         | K16S71X |
| Brass               | MSX                         | K16SMSX |