




Technical data

62/22NR

Single row deep groove ball bearings

Deep groove ball bearing, radial contact, pressed steel cage, snap ring & groove on outer diameter, open

Visual(s)

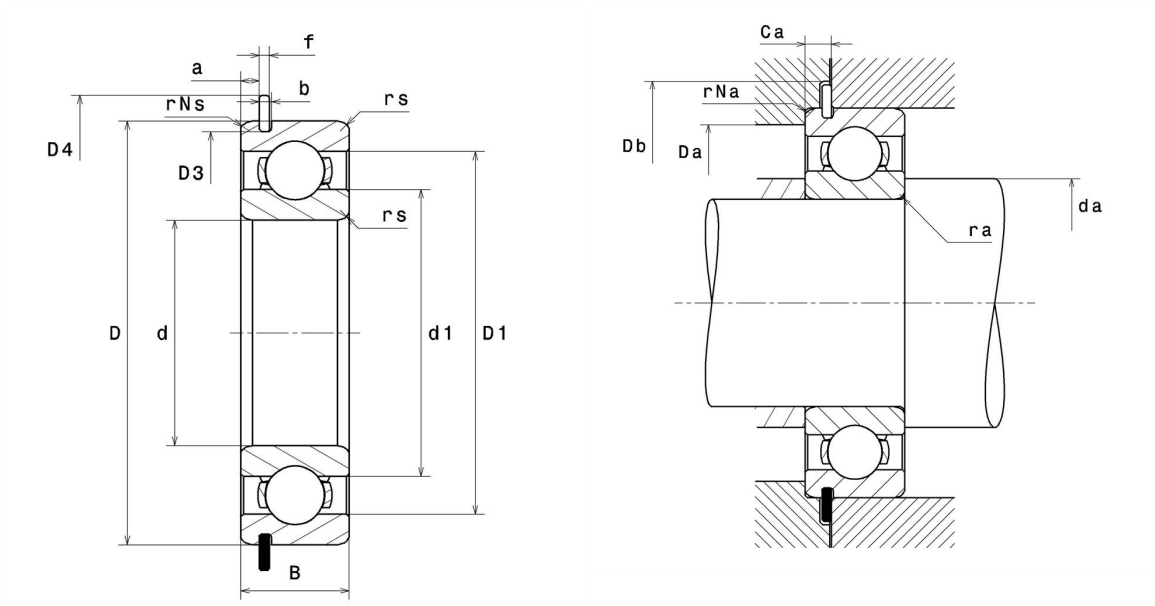

Product definition

d	22 mm
D	50 mm
B	14 mm
a min	2.31 mm
a max	2.46 mm
Ca min	3.43 mm
Ca max	3.58 mm
rs min	1 mm
rNs min	0.5 mm
D3 max	47.6 mm
b min	1.35 mm
b max	1.65 mm
r0 max	0.4 mm
D4 max	55.7 mm
f	1.12 mm
Snap ring reference	R50
Radial clearance class	CN
Mass	0.12 kg
Brand	NTN

Product performance

Dynamic load, C	12.9 kN
Static load, C0	6.8 kN
Fatigue limit load, Cu	0.31 kN
f0	13.5
Nlim (oil)	17,000 Tr/min
Nlim (grease)	14,000 Tr/min
Min operating temperature, Tmin	-20 °C
Max operating temperature, Tmax	120 °C

Abutment dimensions

da min	27 mm
Da max	45 mm
ra max	1 mm
rNa max	0.5 mm
Db min	56.5 mm

Calculation factors

Equivalent dynamic radial load

$$P = X.Fr + Y.Fa$$

$\frac{f_0 F_a}{C_0}$	e	Fa / Fr ≤ e		Fa / Fr > e	
		X	Y	X	Y
0.172	0.19	1	0	0.56	2.3
0.345	0.22				1.99
0.689	0.26				1.71
1.03	0.28				1.55
1.38	0.3				1.45
2.07	0.34				1.31
3.45	0.38				1.15
5.17	0.42				1.04
6.89	0.44				1

Equivalent static radial load

$$Po = X_0.Fr + Y_0.Fa$$

X_0	Y_0
0.6	0.5

For single or DT bearing arrangement :

If $Po < Fr$, then use $Po = Fr$