




Technical data

63/28NR

Single row deep groove ball bearings

Deep groove ball bearing, radial contact, pressed steel cage, snap ring & groove on outer diameter, open

Visual(s)

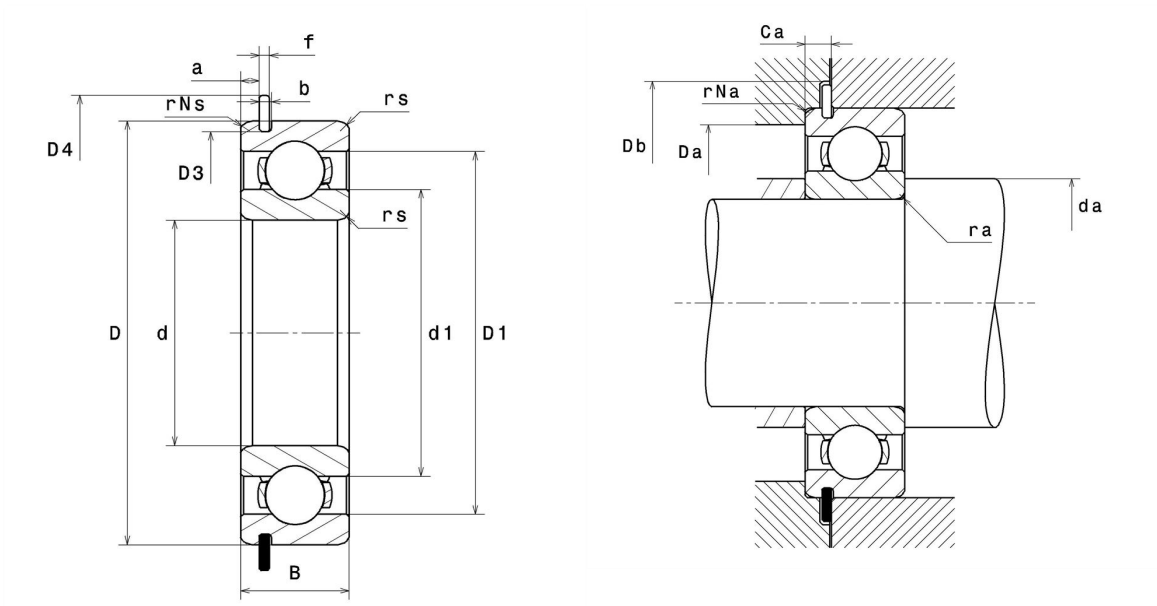

Product definition

d	28 mm
D	68 mm
B	18 mm
a min	3.07 mm
a max	3.28 mm
Ca min	4.77 mm
Ca max	4.98 mm
rs min	1.1 mm
rNs min	0.5 mm
D3 max	64.82 mm
b min	1.9 mm
b max	2.2 mm
r0 max	0.6 mm
D4 max	74.6 mm
f	1.7 mm
Snap ring reference	R68
Radial clearance class	CN
Mass	0.28 kg
Brand	NTN

Product performance

Dynamic load, C	26.7 kN
Static load, C0	14 kN
Fatigue limit load, Cu	0.64 kN
f0	12.4
Nlim (oil)	13,000 Tr/min
Nlim (grease)	11,000 Tr/min
Min operating temperature, Tmin	-20 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.37 Hz
Characteristic rolling element frequency, BSF	3.52 Hz
Characteristic outer ring frequency, BPF0	2.57 Hz
Characteristic inner ring frequency, BPFI	4.43 Hz

Abutment dimensions

da min	34.5 mm
Da max	61.5 mm
ra max	1 mm
rNa max	0.5 mm
Db min	76 mm

Calculation factors

Equivalent dynamic radial load

$$P = X.F_r + Y.F_a$$

$\frac{f_0 F_a}{C_0}$	e	Fa / Fr ≤ e		Fa / Fr > e	
		X	Y	X	Y
0.172	0.19	1	0	0.56	2.3
0.345	0.22				1.99
0.689	0.26				1.71
1.03	0.28				1.55
1.38	0.3				1.45
2.07	0.34				1.31
3.45	0.38				1.15
5.17	0.42				1.04
6.89	0.44				1

Equivalent static radial load

$$P_0 = X_0.F_r + Y_0.F_a$$

X_0	Y_0
0.6	0.5

For single or DT bearing arrangement:

If $P_0 < F_r$, then use $P_0 = F_r$