



The Timken Company

4500 Mt Pleasant St. NW

N. Canton, OH 44720


Phone: (234) 262-3000

E-Mail: CustomerCAD@timken.com • **Web site:** www.timken.com

Part Number HM803145 - HM803110, Tapered Roller Bearings - TS (Tapered Single)

Imperial

This is the most basic and most widely used type of tapered roller bearing. It consists of two main separable parts: the cone (inner ring) assembly and the cup (outer ring). It is typically mounted in opposing pairs on a shaft.

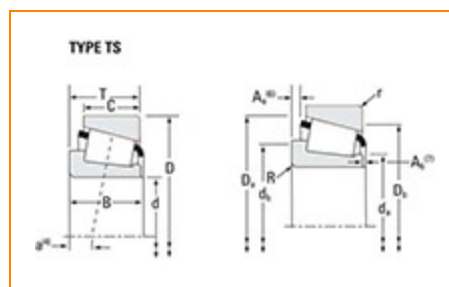

[Specifications](#) | [Dimensions](#) | [Abutment and Fillet Dimensions](#) | [Basic Load Ratings](#) | [Factors](#)

Specifications

Series	HM803100
Cone Part Number	HM803145
Cup Part Number	HM803110
Design Unit	Inch
Cage Material	Stamped Steel

Dimensions



d - Bore

1 5/8 in
41.275 mm

D - Cup Outer Diameter	3.5000 in 88.900 mm
B - Cone Width	1.1563 in 29.370 mm
C - Cup Width	0.9063 in 23.020 mm
T - Bearing Width	1.1875 in 30.163 mm

Abutment and Fillet Dimensions

R - Cone Backface "To Clear" Radius¹	0.03 in 0.760 mm
r - Cup Backface "To Clear" Radius²	0.13 in 3.3 mm
da - Cone Frontface Backing Diameter	2.09 in 53 mm
db - Cone Backface Backing Diameter	2.13 in 54.0 mm
Da - Cup Frontface Backing Diameter	3.39 in 85.10 mm
Db - Cup Backface Backing Diameter	2.91 in 73.91 mm
Ab - Cage-Cone Frontface Clearance	0.11 in 2.8 mm
Aa - Cage-Cone Backface Clearance	0.04 in 1 mm
a - Effective Center Location³	-0.17 in -4.3 mm

Basic Load Ratings

C90 - Dynamic Radial Rating (90 million revolutions)⁴	6630 lbf 29500 N
C1 - Dynamic Radial Rating (1 million revolutions)⁵	25600 lbf 114000 N
C0 - Static Radial Rating	32400 lbf 144000 N
C_{a90} - Dynamic Thrust Rating (90 million revolutions)⁶	6200 lbf 27600 N

Factors

K - Factor⁷	1.07
e - ISO Factor⁸	0.55
Y - ISO Factor⁹	1.1
G1 - Heat Generation Factor (Roller-Raceway)	39.2
G2 - Heat Generation Factor (Rib-Roller End)	13.7
Cg - Geometry Factor¹⁰	0.0974

¹ These maximum fillet radii will be cleared by the bearing corners.

² These maximum fillet radii will be cleared by the bearing corners.

³ Negative value indicates effective center inside cone backface.

⁴ Based on 90×10^6 revolutions L_{10} life, for The Timken Company life calculation method. C_{90} and C_{a90} are radial and thrust values.

⁵ Based on 1×10^6 revolutions L_{10} life, for the ISO life calculation method.


⁶ Based on 90×10^6 revolutions L_{10} life, for The Timken Company life calculation method. C_{90} and C_{a90} are radial and thrust values for a single-row, $C_{90(2)}$ is the two-row radial value.

⁷ These factors apply for both inch and metric calculations. Consult your Timken representative for instruction on use.

⁸ These factors apply for both inch and metric calculations. Consult your Timken representative for instruction on use.

⁹ These factors apply for both inch and metric calculations. Consult your Timken representative for instruction on use.

¹⁰ Geometry constant for Lubrication Life Adjustment Factor a_3 .

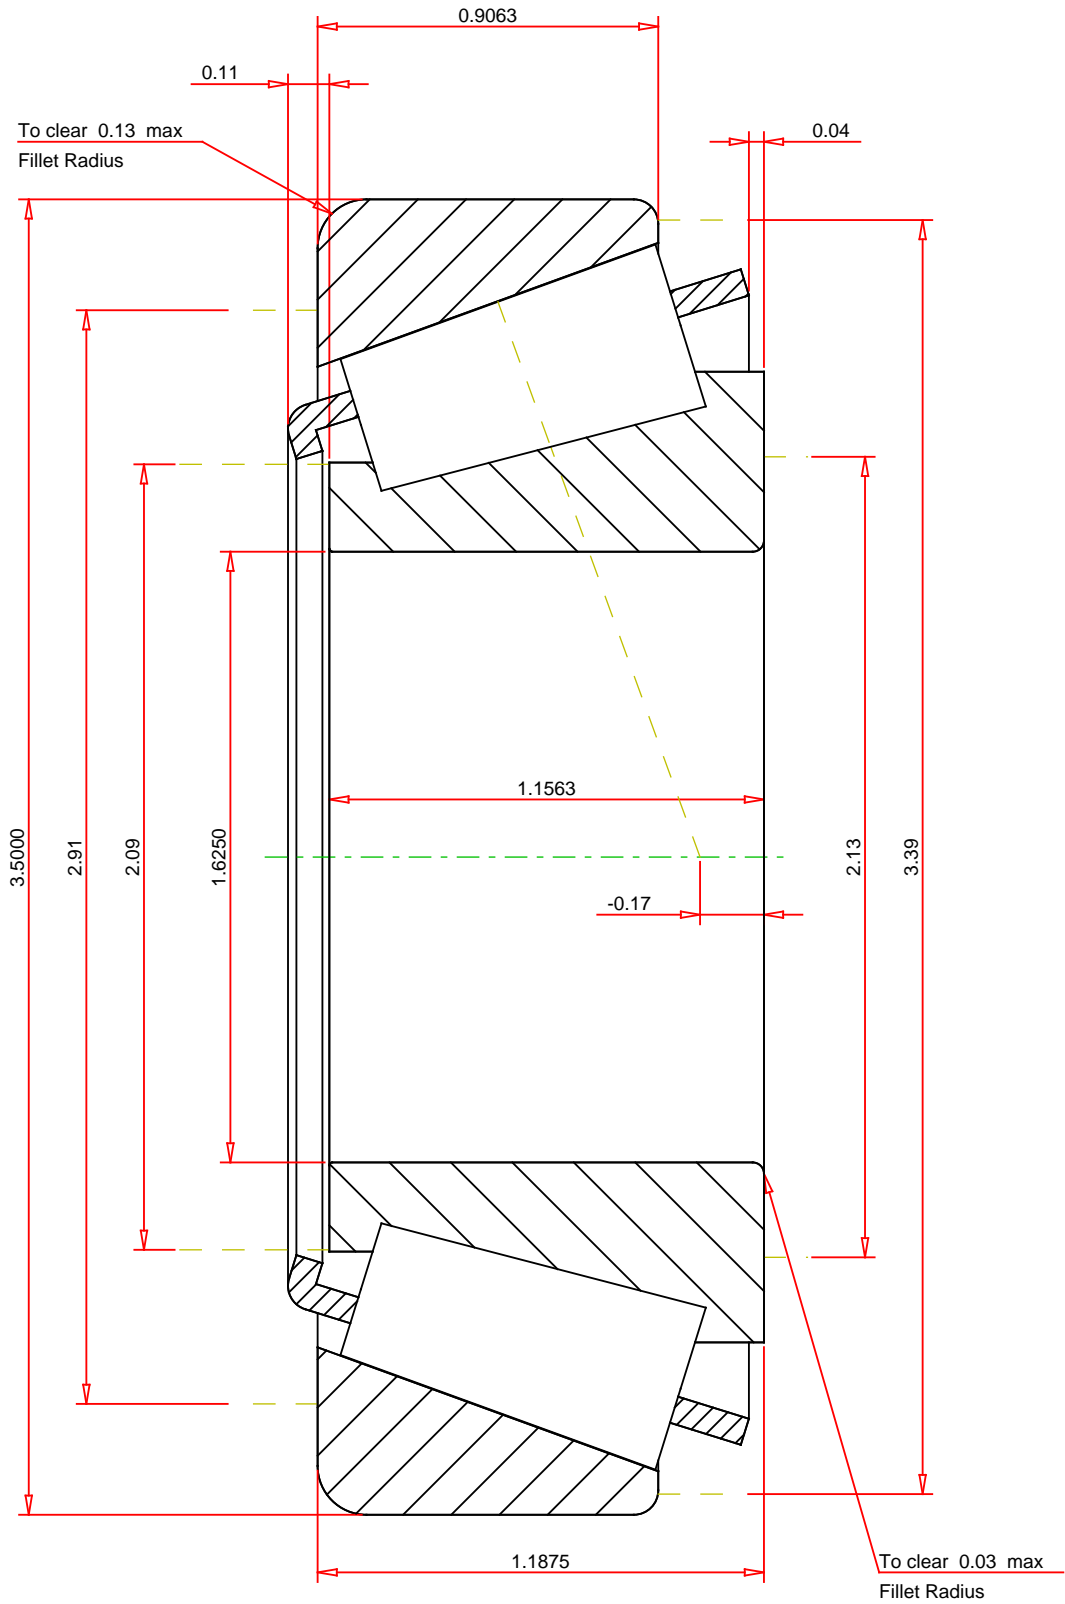

IMPERIAL UNITS

ISO Factor - e 0.55
ISO Factor - Y 1.1
Bearing Weight 2 lb
Number of Rollers Per Row 18
Effective Center Location -0.17 inch

TIMKEN®

THE TIMKEN COMPANY
NORTH CANTON, OHIO USA

HM803145 - HM803110
Tapered Roller Bearings - TS (Tapered Single)
Imperial

K Factor	1.07
Dynamic Radial Rating - C90	6630 lbf
Dynamic Thrust Rating - Ca90	6200 lbf
Static Radial Rating - C0	32400 lbf
Dynamic Radial Rating - C1	25600 lbf

Every reasonable effort has been made to ensure the accuracy of the information contained in this writing, but no liability is accepted for errors, omissions or for any other reason.

FOR DISCUSSION ONLY